


# David Weeks Studio



No. 109

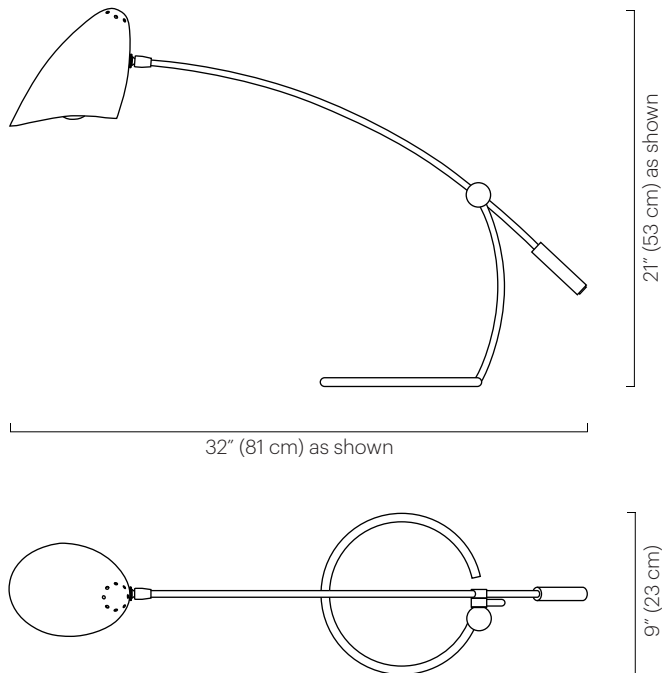

Bullet shade option



Bottle shade option

**Description**

The Adjustable Arc features a counterweighted arm that adjusts up and down to desired height. The handspun aluminum shade rotates 320 degrees to cast light directionally. May be ordered with Bullet or Bottle shades.

**Materials**

Shade: Powder coated aluminum  
Frame: Plated steel  
Counterweight: Power coated steel

**Shade Color Bullet**

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

**Shade Color Bottle**

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

**Finish**

- Polished Nickel
- Brushed Brass

Custom finishes available.

**Lamping**

120V: A19 or A15 medium base 60W max  
220-240V: E27 base 60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

**Wattage**

60 watts max

**Weight**

5 lbs (2.3 kg)

**Remarks**

Bullet shade: On/Off switch located on cord.  
Bottle shade 120V: On/Off switch located on shade and cord.  
220-240V: On/Off switch located on cord.

**Remarks Continued**

Available to be wired UL.  
Cord color is black; length approx. 7 feet.  
Counterweight and arm adjustment are always black.  
Indoor use and dry locations only.

**Dimensions**


Base: 9" Ø (23 cm)  
Height variable.  
Adjusts up to 36.5" H (93 cm)  
Bullet Shade: 9" H x 6" W x 6.5" D (23 H x 15 W x 17 cm D)  
Bottle Shade: 8.5" H x 5.5" W x 8.5" D (22 H x 14 W x 22 cm D)



# Sarus Table Lamp

## TECHNICAL SPECIFICATIONS

No. 113

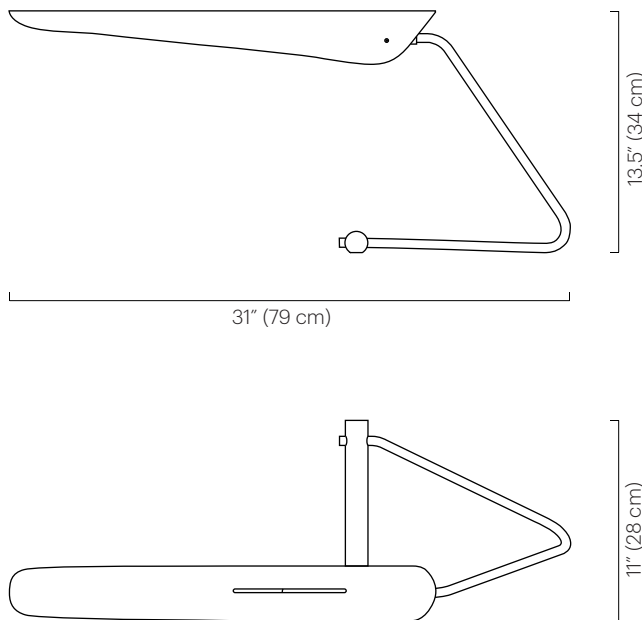

### Description

The Sarus shade is mounted to a hand bent steel frame. The powder coated aluminum shade rotates 320° to cast light directionally.

### Materials

Shade: Powder coated aluminum  
Frame: Plated steel  
Base: Powder coated steel

### Base & Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

### Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

### Lamping

120V: T10 tubular incandescent medium base 60W max  
220-240V: E27 base (tubular 32mm recommended) 60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

### Wattage

60 watts max

### Weight

5 lbs (2.3 kg)

### Remarks

Available to be wired UL.  
On/Off switch located on cord.  
Shade and base are same color.  
Cord color is black; length approx. 7 feet.  
Indoor use and dry locations only.

### Dimensions

31" D x 11" W x 13.5" H  
(79 D x 28 W x 34 cm H)  
Shade: 3" Ø x 23" L  
(8 Ø x 58 cm L)




David  
Weeks  
Studio

[www.DavidWeeksStudio.com](http://www.DavidWeeksStudio.com)

# Boi Table Lamp

## TECHNICAL SPECIFICATIONS

No. 118

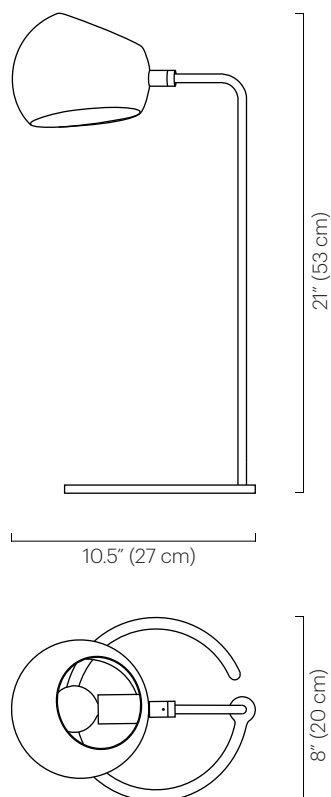

### Description

The Boi Table Lamp features a powder coated steel shade and weighted ring base. The Boi shade rotates 320° to cast light directionally.

### Materials

Shade: Powder coated steel  
Frame: Plated steel  
Base: Powder coated steel

### Base & Shade Color

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- Orange Gloss (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

### Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

### Lamping

120V: G16.5 globe bulb  
candelabra base 60W max  
220-240V: E14 base golf ball  
60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

### Wattage

60 watts max

### Weight

5 lbs (2.3 kg)

### Remarks

Not UL listed.  
On/Off switch located on cord.  
Cord color is black;  
length approx. 7 feet.  
Indoor use and dry locations only.

### Dimensions

10.5" D x 8" W x 21" H  
(27 D x 20 W x 53 cm H)  
Shade: 6" Ø x 5.5" H  
(15 Ø x 14 cm H)



**David  
Weeks  
Studio**



[www.DavidWeeksStudio.com](http://www.DavidWeeksStudio.com)



# Kopra Table Lamp

## TECHNICAL SPECIFICATIONS

No. 120

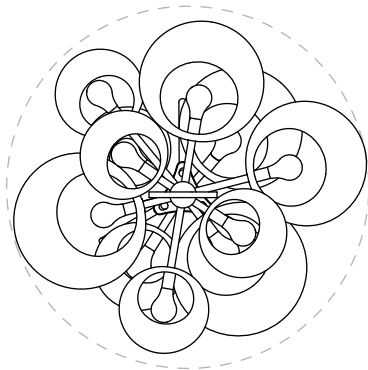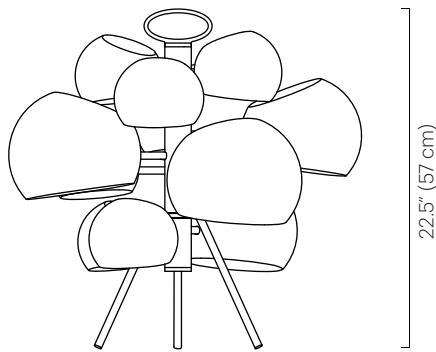

24" (61 cm) approx diameter



### Description

The Kopra Table lamp features eleven Boi shades of various sizes on a three legged frame topped with an oval handle. Each shade rotates 320° to cast light directionally.

### Materials

Shades: Powder coated steel  
Frame: Powder coated steel

### Frame & Shade Color

- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)
- White Gloss (white gloss interior)

Custom colors available.

### Lamping

120V: (11) G16.5 globe bulbs  
candelabra base  
40W max, 20W recommended  
220-240V: (11) E14 base golf ball  
40W max 20W recommended  
Note: Bulbs not included.  
Halogen bulbs not recommended.

### Wattage

440 watts max

### Weight

20 lbs (9 kg)

### Remarks

Not UL listed.  
Dimmer switch located on cord.  
Cord color is black;  
length approx. 7 feet.  
Indoor use and dry locations only.

### Dimensions

Approx diameter: 24" (61 cm)  
Height: 22.5" (57 cm)




**David  
Weeks  
Studio**

[www.DavidWeeksStudio.com](http://www.DavidWeeksStudio.com)

# Fenta Table Lamp

## TECHNICAL SPECIFICATIONS

No. 121

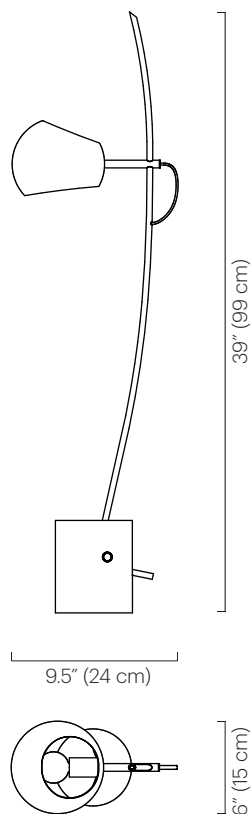

### Description

The Fenta lamp features a cylindrical cement cast base. The hand formed brass arm is secured by a wooden dowel. The Boi shade has two openings casting light both up and down.

### Materials

Shade: Powder coated steel  
Frame: Plated brass  
Base: Cement  
Dowel: Hardwood

### Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

### Base Color

- Natural Cement
- Darkened Cement

### Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

### Lamping

120V: G16.5 globe bulb  
candelabra base 60W max  
220-240V: E14 base golf ball  
60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

### Wattage

60 watts max

### Weight

10 lbs (4.5 kg)

### Remarks

Available to be wired UL.  
On/Off switch located on cord.  
Cord color is black;  
length approx. 7 feet.  
Fixed shade does not swivel.  
Indoor use and dry locations only.

### Dimensions


9.5" D x 6" W x 39" H  
(24 D x 15 W x 99 cm H)  
Base: 5" Ø x 6" H  
(13 Ø x 15 cm H)  
Shade: 6" Ø x 5.5" H  
(15 Ø x 14 cm H)

**David  
Weeks  
Studio**

[www.DavidWeeksStudio.com](http://www.DavidWeeksStudio.com)



No. 202

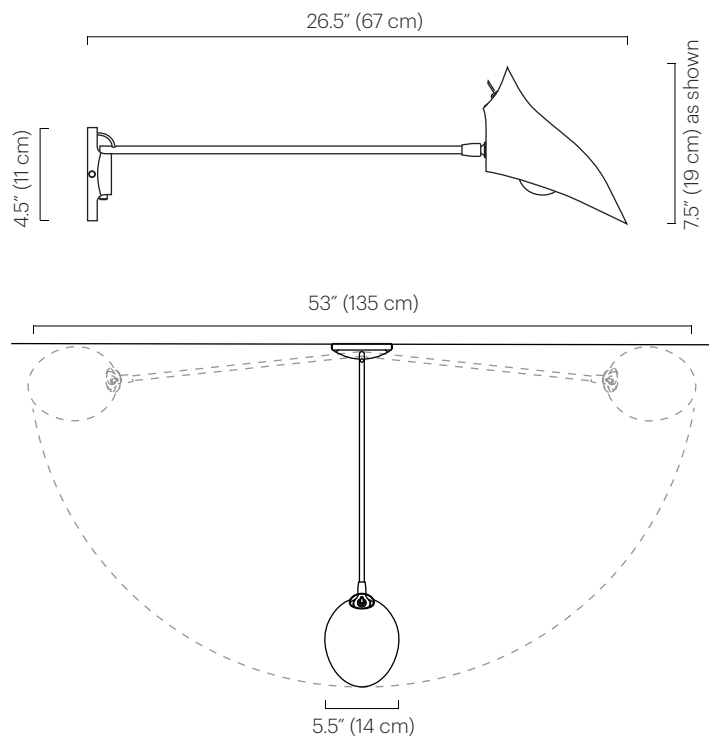

### Description

The One Arm Sconce features a single arm affixed to a solid wood wall mount and steel mounting ring. The arm swings from side to side with a handspun aluminum Bottle shade. The shade rotates 320° to cast light directionally.

### Materials

Shade: Powder coated aluminum  
Wall Mount: Finished wood  
Arm: Plated steel  
Mounting Ring: Plated steel

### Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

### Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

### Weight

5 lbs (2.3 kg)

### Wall Mount

(matches specified shade)  
● Black Satin: Opaque paint on maple  
● Grey Gloss: Opaque paint on maple  
● Ivory Satin: Opaque paint on maple

Also available:

- Natural Walnut (clear finish)
- Natural Maple (clear finish)

### Lamping

120V: A19 or A15  
medium base 60W max  
220-240V: E14 base golf ball  
60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

### Wattage

60 watts max

### Remarks

UL listed.  
Hardwired is standard.  
Custom cord & plug available.  
Cord color is black.  
120V: Switch is on shade.  
220-240V: Hardwired to wall; no switch on shade.  
Custom arm length available (36" max).  
Mounting ring matches arm finish.  
Walnut and maple wood mounts will vary in color from fixture to fixture.  
Indoor use and dry locations only.

### Dimensions


Arm Length: 26.5" (67 cm)  
Wingspan: 53" (135 cm)  
Wall mount diameter: 4.5" (11 cm)  
Shade: 8.5" H x 5.5" W 8.5" D  
(22 H x 14 W x 22 cm D)



# Two Arm Sconce

# TECHNICAL SPECIFICATIONS

No. 203

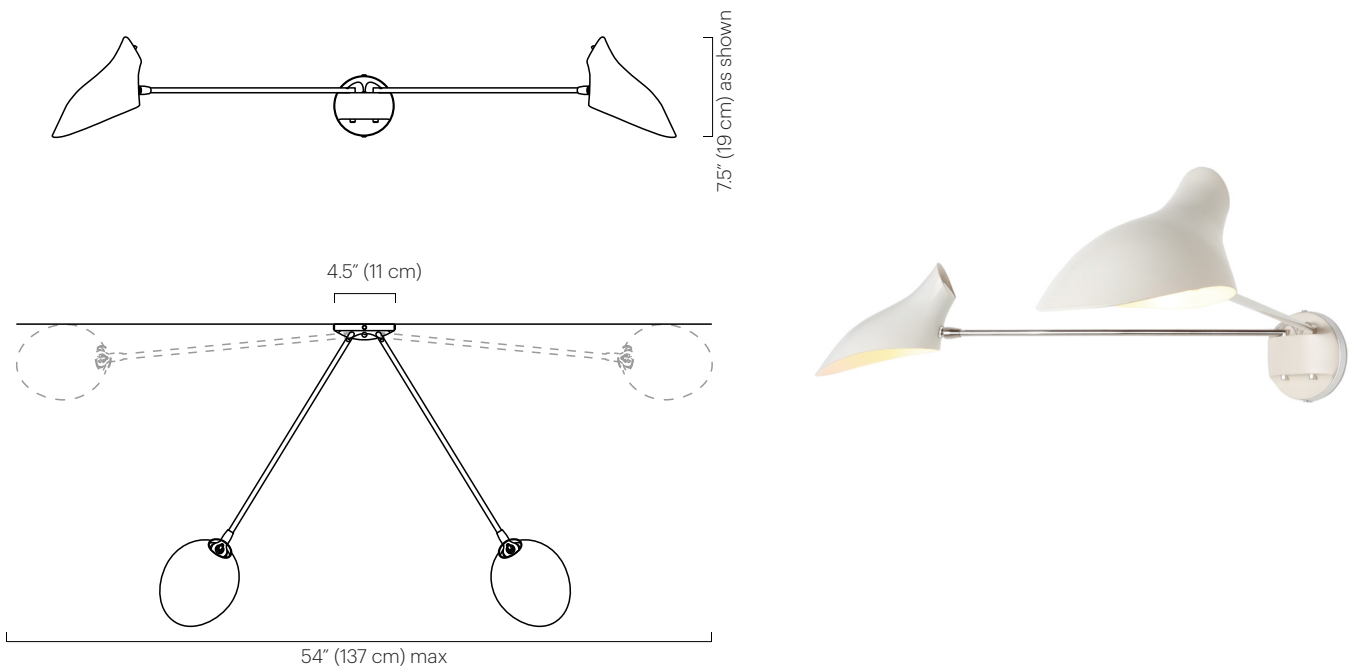

**Description**

The Two Arm Sconce features dual arms affixed to a solid wood wall mount and steel mounting ring. The arms swing from side to side with handspun aluminum Bottle shades. The shades rotate 320° to cast light directionally.

**Materials**

Shade: Powder coated aluminum  
Wall Mount: Finished wood  
Arm: Plated steel  
Mounting Ring: Plated steel

**Shade Color**

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

**Finish**

- Polished Nickel
- Brushed Brass

Custom finishes available.

**Weight**

5 lbs (2.3 kg)

**Wall Mount**

(matches specified shade)  
● Black Satin: Opaque paint on maple  
● Grey Gloss: Opaque paint on maple  
● Ivory Satin: Opaque paint on maple

Also available:

- Natural Walnut (clear finish)
- Natural Maple (clear finish)

**Lamping**

120V: A19 or A15  
medium base 60W max  
220-240V: E14 base golf ball  
60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

**Wattage**

120 watts max

**Remarks**

UL listed.  
Hardwired is standard.  
Custom cord & plug available.  
Cord color is black.  
120V: Switch is on shade.  
220-240V: Hardwired to wall; no switch on shade.  
Custom arm length available (36" max).  
Mounting ring matches arm finish.  
Walnut and maple wood mounts will vary in color from fixture to fixture.  
Indoor use and dry locations only.

**Dimensions**


Arm Length: 26.5" (67 cm)  
Wingspan: 54" (137 cm)  
Wall mount diameter: 4.5" (11 cm)  
Shade: 8.5" H x 5.5" W 8.5" D  
(22 H x 14 W x 22 cm D)



David  
Weeks  
Studio

www.DavidWeeksStudio.com

No. 206

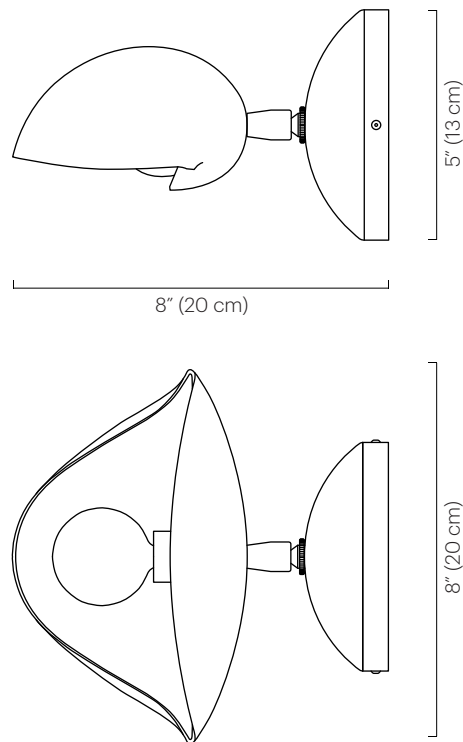

**Description**

Featuring a hand-formed Shell shade, the Shell Sconce rotates 320 degrees to cast light directionally.

**Materials**

Shade: Powder coated aluminum  
Wall mount: Powder coated steel  
Hardware: Plated brass

**Mount & Shade Color**

- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

**Hardware**

- Nickel
- Brass

Custom finishes available.

**Lamping**

120V: G16.5 globe bulb  
candelabra base 40W max  
220-240V: E14 base golf ball  
40W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

**Wattage**

40 watts max

**Weight**

5 lb (2.3 kg)

**Remarks**


UL listed.  
Hardwired is standard.  
Custom cord & plug available.  
Custom switch available on  
wall mount.  
Indoor use and dry locations only.  
Shade shape may vary slightly.

**Dimensions**

8" D x 4.5" H x 8" W  
(20 D x 11 H x 20 cm W)  
Wall mount diameter: 5" (13 cm)  
Shade (approx.): 3.5" H x 9" W x 6" D  
(9 H x 23 x 15 cm D)



No. 209

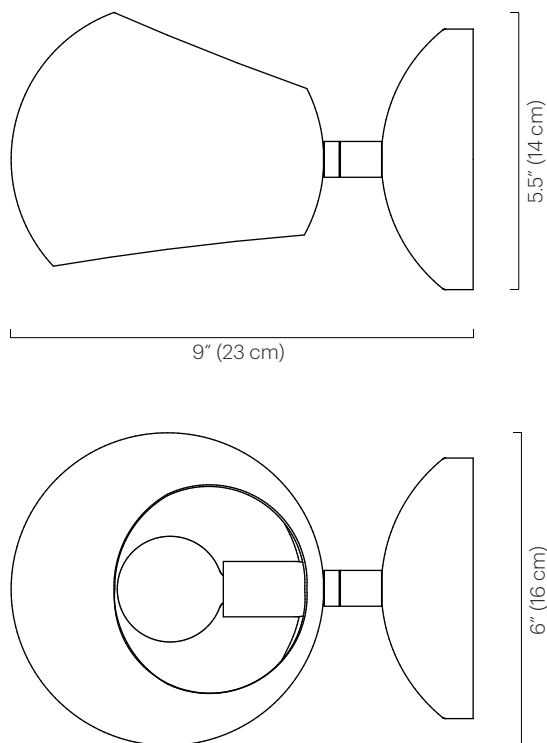**Description**

Featuring a small Boi shade with openings at both the top and the bottom, the Boi Sconce allows light to flow through the entirety of the fixture. The shade rotates 320° to cast light directionally.

**Materials**

Shade: Powder coated steel  
Wall mount: Powder coated steel  
Hardware: Plated brass

**Mount & Shade Color**

- Black Gloss (black gloss interior)
- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- Orange Gloss (ivory satin interior)
- White Gloss (white gloss interior)
- White Satin (white satin interior)

Custom colors available.

**Hardware**

- Nickel
- Brass

Custom finishes available.

**Lamping**

120V: G16.5 globe bulb  
candelabra base 60W max  
220-240V: E14 base golf ball  
60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

**Wattage**

60 watts max

**Weight**

5lb (2.3 kg)

**Remarks**


UL listed.  
Hardwired is standard.  
Custom cord & plug available.  
Custom switch available on  
wall mount.  
Indoor use and dry locations only.

**Dimensions**

9" D x 6" W x 5" H  
(23 D x 16 W x 13 cm H)  
Wall mount diameter: 5" (13 cm)  
Shade: 6" Ø x 5.5" H  
(15 Ø x 14 cm H)



No. 214

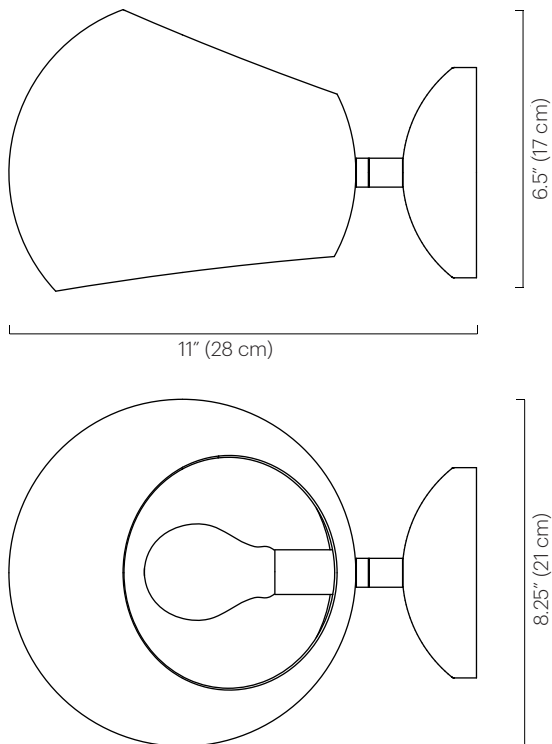

### Description

Featuring a large Boi shade with openings at both the top and the bottom, the Big Boi Sconce allows light to flow through the entirety of the fixture. The shade rotates 320° to cast light directionally.

### Materials

Shade: Powder coated steel  
Wall mount: Powder coated steel  
Hardware: Plated brass

### Mount & Shade Color

- Black Gloss (black gloss interior)
- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- Orange Gloss (ivory satin interior)
- White Gloss (white gloss interior)
- White Satin (white satin interior)

Custom colors available.

### Hardware

- Nickel
- Brass

Custom finishes available.

### Lamping

120V: A19 or A15  
medium base 60W max  
220-240V: E27 base 60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

### Wattage

60 watts max

### Weight

5 lbs (2.3 kg)

### Remarks


UL listed.  
Hardwired is standard.  
Custom cord & plug available.  
Custom switch available  
on wall mount.  
Indoor use and dry locations only.

### Dimensions

11" D x 8.25" W x 6.5" H  
(28 D x 21 W x 17 cm H)  
Wall mount diameter: 5" (13 cm)  
Shade: 8.25" Ø x 6.5" H  
(21 Ø x 17 cm H)



## No. 215

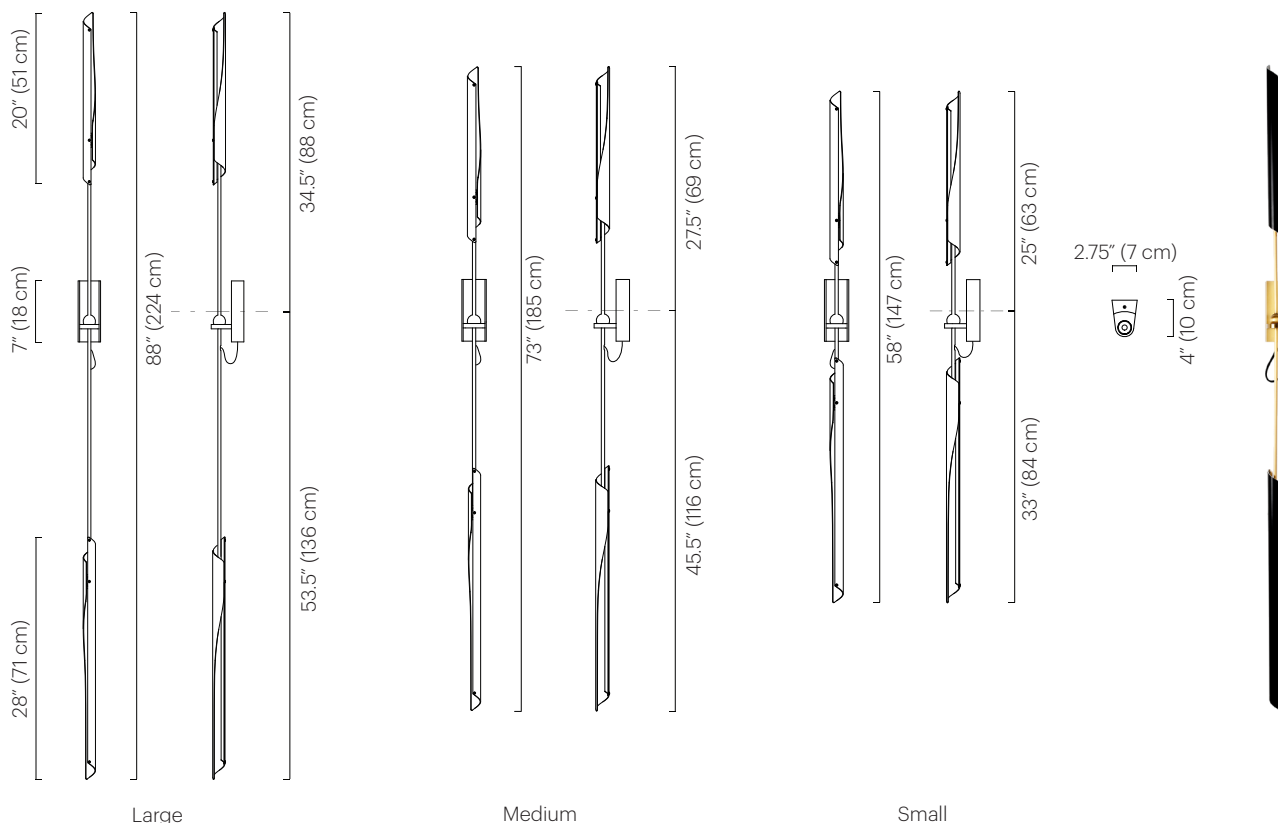**Description**

The OTTO torch is comprised of two different sized OTTO shades mounted on opposite ends of the arm. Each shade contains a dimmable LED source and rotates 300° to cast light directionally. Available in three sizes.

**Materials**

Shade: Powder coated aluminum  
 Wall mount: Plated brass  
 Frame: Plated brass  
 Hardware: Plated and polished brass

**Shade Color**

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

**Finish**

- Brushed Brass
- Polished Nickel

Custom finishes available.

**Lamping**

LED: Warm white 2700K  
 Lumens: 1340 (equivalent to two 60W incandescent bulbs)  
 CRI: 80+  
 LED power source: 40W 24V phase dimmable class 2  
 50,000 LED life hours (approx.)

**Power Supply**

For 120V areas: included in wall mount.  
 For 220-240V areas: remote power supply only. Not included.

**Dimmer Compatibility**

Dimmable with MLV/TRIAC (leading edge) switch

**Voltage / Wattage**

24 v / 22 watts

**Weight**

10 lbs (4.5 kg)

**Remarks**

ADA compliant depth.  
 Hardwired is standard.  
 Black exterior electrical cord is standard.  
 Hardware finish consistent with frame finish.  
 Indoor use and dry locations only.  
 Wall mount designed to fit 2" x 4" vertical switch box only.


**Dimensions**

Large: 4" D x 2.75" W x 88" H  
 (10 D x 7 W x 224 cm H)  
 Medium: 4" D x 2.75" W x 73" H  
 (10 D x 7 W x 185 cm H)  
 Small: 4" D x 2.75" W x 58" H  
 (10 D x 7 W x 147 cm H)  
 Bracket: 4" D x 2.75" W x 7" H  
 (10 D x 7 W x 18 cm H)  
 Top shade: 1.5" Ø x 20" L  
 (4 Ø x 51 cm L)  
 Bottom shade: 1.5" Ø x 28" L  
 (4 Ø x 71 cm L)





No. 218

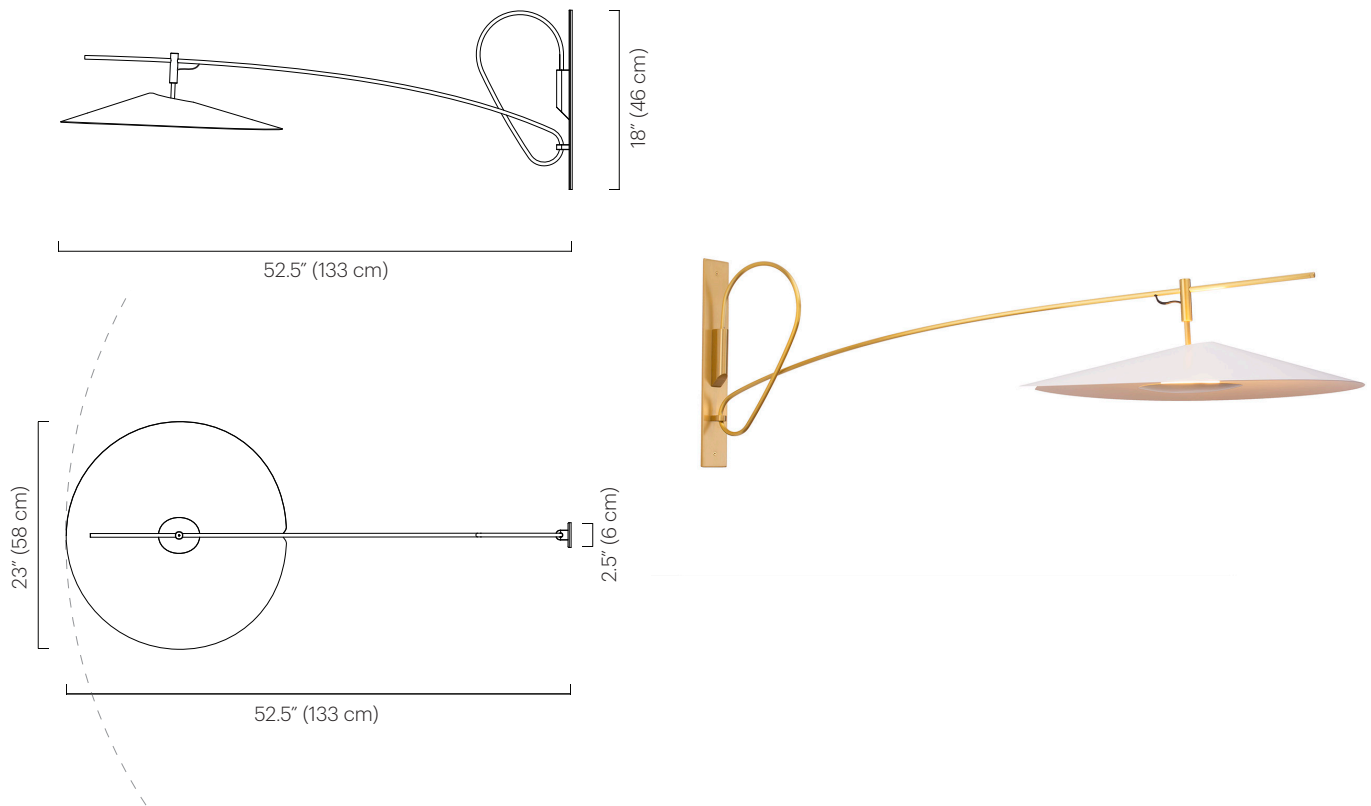

### Description

The Treble Sconce features a single arm anchored by a solid brass wall mount. The sconce has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with a glass diffuser. The arm swings side to side from the wall mount.

### Materials

Shade: Anodized or powder coated aluminum  
Frame: Plated brass  
Wallmount: Plated brass  
Lamp enclosure: Glass, aluminum, steel and plated brass.

### Shade Color

Powder coated:

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Anodized:

- Polished Black (matte gold interior)
- Polished Black (red ombre interior)

### Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

### Lamping

LED: Warm white 2700K  
Lumens: 1200 (equivalent to one 75W incandescent bulb)  
CRI: 95+  
50,000 LED life hours (approx.)

### Power Supply

For 120V areas: 60W 24V dimmable Class 2 included in canopy.  
For 220-240V areas: remote power supply only. Not included.

### Dimmer Compatibility

ELV Dimmer compatible

### Voltage / Wattage

24V / 11.5 W

### Weight

15 lbs (6.8 kg)

### Remarks


Arm length is fixed.  
Shade does not rotate.  
Black exterior electrical cord is standard.  
Custom arm length available 36" - 72" (91-182 cm)  
Additional weight support recommended.  
Hardware finish consistent with frame finish.  
Indoor use and dry locations only.  
Wall mount designed to fit 2" x 4" vertical switch box only.

### Dimensions

52.5" L x 23" W x 18" H  
(133 L x 58 W x 46 cm H)  
Wallmount: 2.5" W x 18" H  
(6 W x 46 cm H)  
Shade: 23" Ø x 4" H  
(58 Ø x 10 cm H)



No. 303

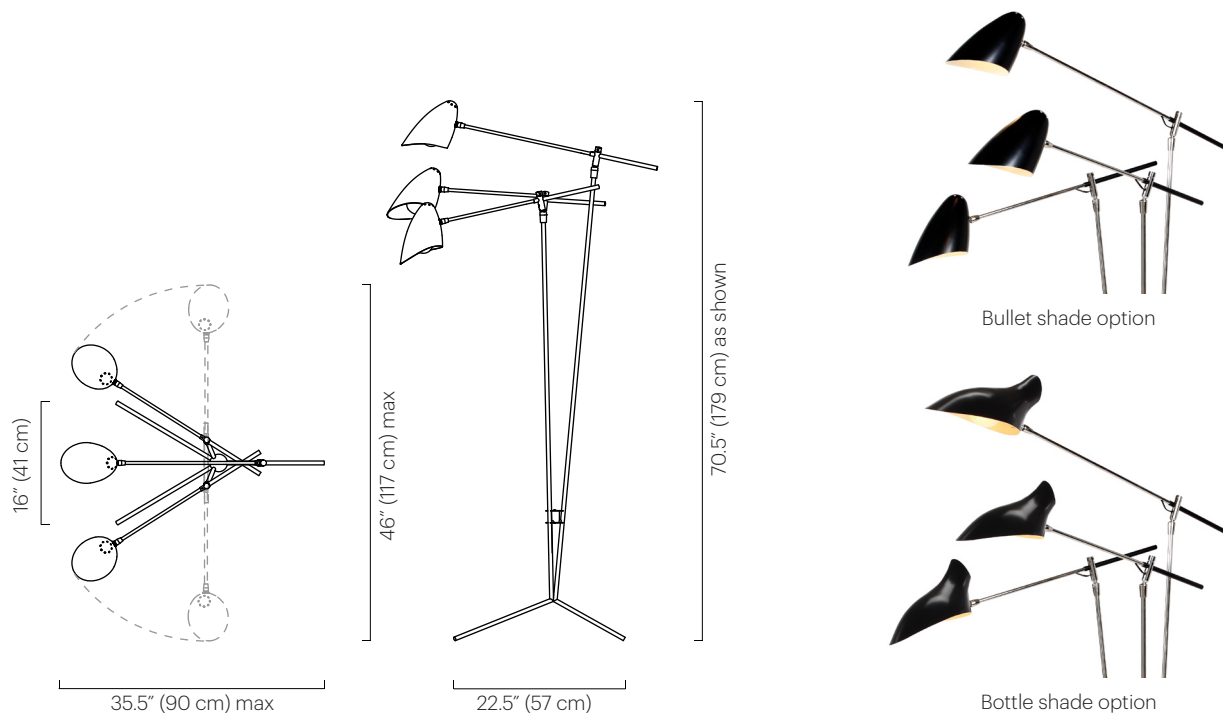

## Description

The Tripod features three counterweighted arms that adjust up and down and swivel side to side. Handspun shades on each arm rotate 320° to cast light directionally. May be ordered with Bullet or Bottle shades.

## Materials

Shades: Powder coated aluminum  
Frame: Plated steel  
Counterweight: Powder coated steel

## Shade Color Bullet

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

## Shade Color Bottle

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

## Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

## Lamping

120V: (3)A19 or A15  
medium base 60W max  
220-240V:  
Bullet: (3)E27 base 60W max  
Bottle: (3)E14 base 60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

## Wattage

180 watts max

## Weight

15 lbs (6.8 kg)

## Remarks

Not UL listed.  
Bullet shade: On/Off dimmer switch on cord.  
Bottle shade:  
120V: On/Off switch on shade, dimmer on cord.  
220-240V: On/Off dimmer switch on cord.

## Remarks Continued


Cord color is black;  
length approx. 10 feet.  
Counterweight is black.  
Indoor use and dry locations only.

## Dimensions

22.5" D x 16" W x 65" H  
(57 D x 41 W x 165cm H)  
Max depth: 35.5" (90 cm)  
Shade height variable:  
Min height: 42" (107 cm)  
Max height: 78" (198 cm)  
Wingspan: 46" (117 cm)  
Bullet Shade: 9" H x 6" W x 6.5" D  
(23 H x 15 W x 17 cm D)  
Bottle Shade: 8.5" H x 6" W 8.5" D  
(22 H x 15 W x 22 cm D)



No. 305

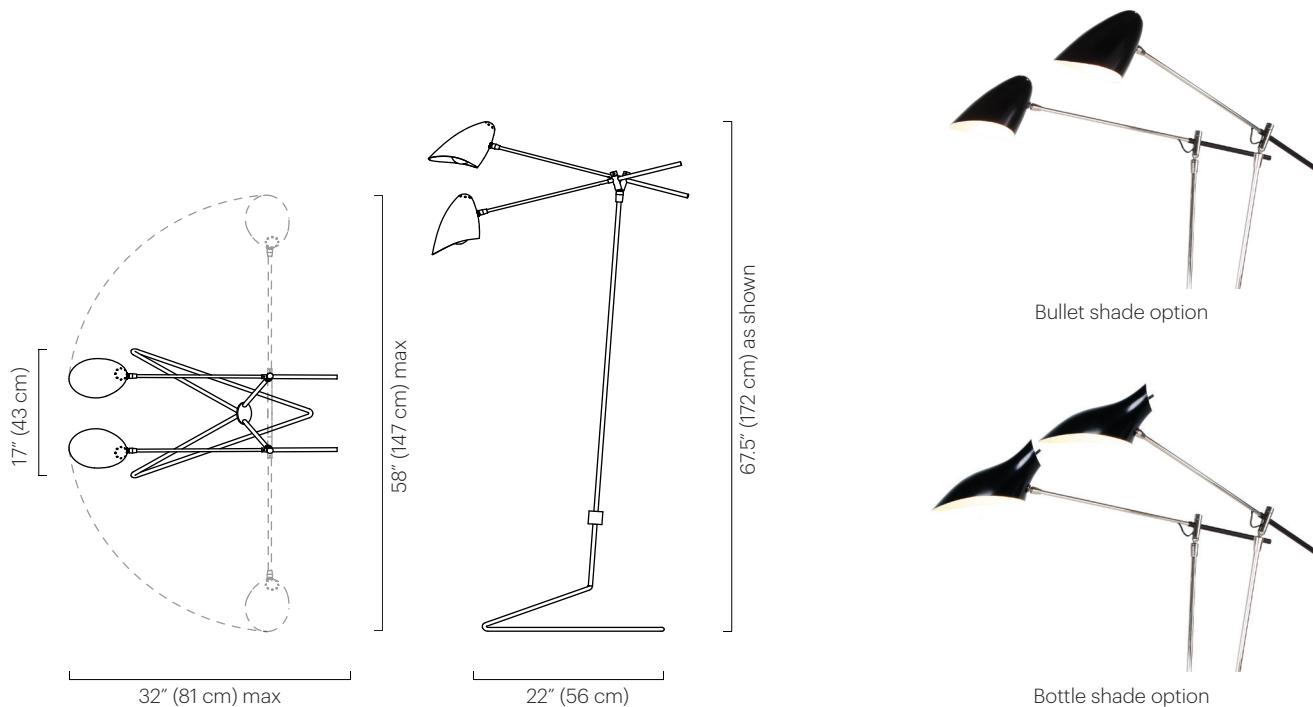

### Description

The Doublepod is a standing lamp that features two counter-weighted arms that adjust up and down and swivel side to side. Handspun shades rotate 320° to cast light directionally. May be ordered with Bullet or Bottle shades.

### Materials

Shades: Powder coated aluminum  
Frame: Plated steel  
Counterweight: Powder coated steel

### Shade Color Bullet

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

### Shade Color Bottle

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

### Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

### Lamping

120V: (2)A19 or A15  
medium base 60W max  
220-240V:  
Bullet: (2)E27 base 60W max  
Bottle: (2)E14 base 60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

### Wattage

120 watts max

### Weight

15 lbs (7 kg)

### Remarks

Not UL listed.  
Bullet shade: On/Off: dimmer switch on cord.  
Bottle shade:  
120V: On/Off switch on shade, dimmer on cord.  
220-240V: On/Off dimmer switch on cord.

### Remarks Continued


Cord color is black; length approx. 10 feet. Counterweight is black. Indoor use and dry locations only.

### Dimensions

22" D x 17" W x 61" H  
(56 D x 43 W x 155cm H)  
Max depth: 32" (81 cm)  
Shade height variable:  
Min height: 45" (114 cm)  
Max height: 72" (183 cm)  
Wingspan: 58" (147 cm)  
Bullet Shade: 9" H x 6" W x 6.5" D  
(23 H x 15 W x 17 cm D)  
Bottle Shade: 8.5" H x 6" W 8.5" D  
(22 H x 15 W x 22 cm D)



No. 306

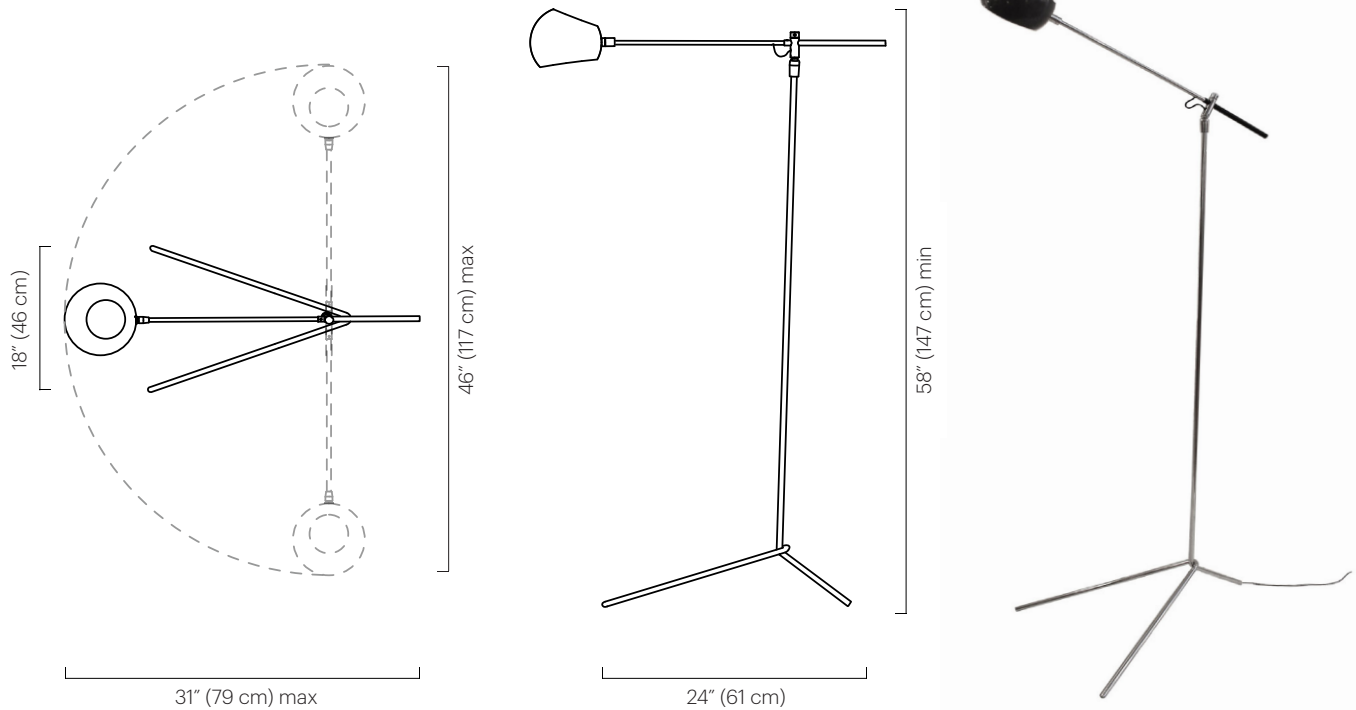

## Description

The Monopod is a standing lamp that features a powder coated Boi shade with openings at the top and bottom. The counterweighted arm swivels side to side and adjusts up and down. The shade rotates 320° to cast light directionally.

## Materials

Shade: Powder coated steel  
Frame: Plated steel  
Counterweight: Powder coated steel

## Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- Orange Gloss (ivory satin interior)
- Black Gloss (black gloss interior)
- White Gloss (white gloss interior)
- White Satin (white satin interior)

Custom colors available.

## Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

## Lamping

120V: G16.5 globe  
candelabra base 60W max  
220-240V: E14 base golf ball  
60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

## Wattage

60 watts max

## Weight

15 lbs (7 kg)

## Remarks

Not UL listed.  
Dimmer switch on cord.  
Cord color is black;  
length approx. 10 feet.  
Counterweight is black.  
Indoor use and dry locations only.

## Dimensions

24" D x 18" W x 58" H  
(61 D x 46 W x 147cm H)  
Max depth: 31" (79 cm)  
Shade height variable:  
Min height: 45" (114 cm)  
Max height: 66" (168 cm)  
Wingspan: 46" (117 cm)  
Shade: 6" Ø x 5.5" H  
(15 Ø x 14 cm H)



No. 307



**Description**

The Cement Standing Lamp features a cast cement base, finished with a stainless steel arm and the choice of a hand formed Shell shade or a Boi shade. Shade rotates 320° to cast light directionally.

**Materials**

Shell shade:  
Powder coated aluminum  
Boi shade:  
Powder coated steel  
Frame: Stainless steel  
Base: Cement

**Shade Color: Shell**

- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

**Shade Color: Boi**

- Black Gloss (black gloss interior)
- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- Orange Gloss (ivory satin interior)
- White Gloss (white gloss interior)
- White Satin (white satin interior)

Custom colors available.

**Base Color**

- Natural Cement
- Darkened Cement

**Finish**

- Stainless Steel

**Lamping**

120V:  
Shell Shade: G16.5 globe bulb  
candelabra base 40W max  
220-240V:  
Boi Shade: G16.5 globe bulb  
candelabra base 60W max  
Shell Shade: E14 base golf ball  
40W max  
Boi Shade: E14 base golf ball  
60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

**Wattage**

Shell: 40 watts max  
Boi: 60 watts max

**Weight**

20 lbs (9 kg)

**Remarks**

Available to be wired UL.  
On/Off dimmer switch  
located on cord.  
Cord color is black;  
length approx. 10 feet.  
Indoor use and dry locations only.

**Dimensions: Shell**

14.5" D x 9" W x 59.5" H  
(37 D x 23 W x 151 cm H)  
Shade (approx.): 3.5" H x 9" W x 6" D  
(9 H x 23 x 15 cm D)

**Dimensions: Boi**


14" D x 6" W x 59" H  
(36 D x 15 W x 150 cm H)  
Shade: 6" Ø x 5.5" H  
(15 Ø x 14 cm H)

**Dimensions: Cement Base**

4.75" D x 4.75" W x 8.5" H  
(12 D x 12 W x 22 cm H)



No. 308

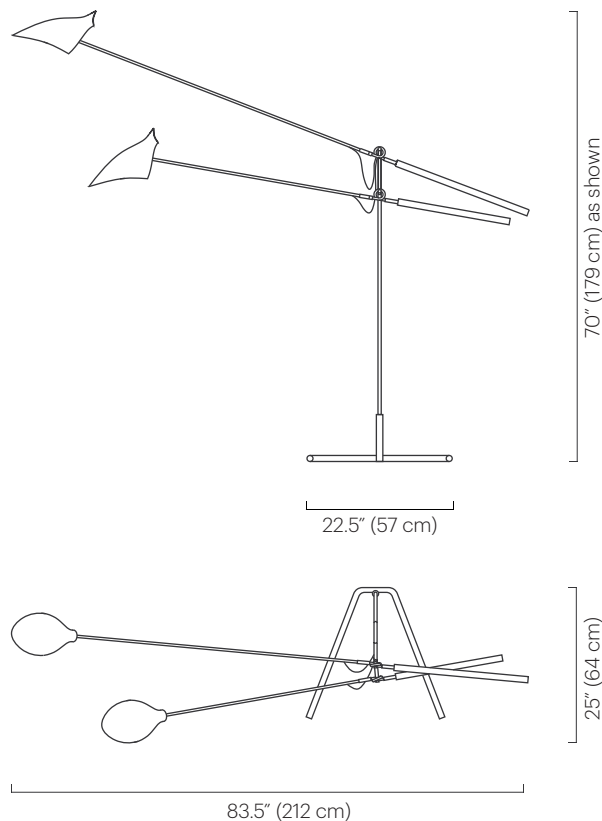

shown left facing

## Description

The Loop & Hook is a kinetic fixture using counterweights to adjust the height of each arm. Available with a left or right facing orientation. Large bottle shades rotate 320° to cast light directionally.

## Materials

Shades: Powder coated aluminum  
Frame: Plated steel  
Counterweight: Power coated steel

## Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

## Finish

- Polished Nickel

## Lamping

120V: (2)A19 or A15  
medium base 60W max  
220-240V: (2)E27 base 60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

## Wattage

120 watts max

## Weight

30 lbs (13.6 kg)

## Remarks

Not UL listed.  
120V: Switches on shades and dimmer on cord.  
220-240V: On/Off dimmer on cord.  
Specify left or right facing.  
Counterweights are black.  
Cord color is black;  
length approx. 10 feet.  
Indoor use and dry locations only.

## Dimensions


Base: 22.5" W x 25" D  
(57 W x 64 cm D)  
Arms: 82" and 64"  
(208 cm and 163 cm)  
Shade heights variable:  
Min height: 48" (122 cm)  
Max height: 88" (224 cm)  
Shade: 13.5" L x 7" W x 9" D  
(34 L x 18 W x 23 cm D)



# Torroja Standing Lamp

## TECHNICAL SPECIFICATIONS

No. 309

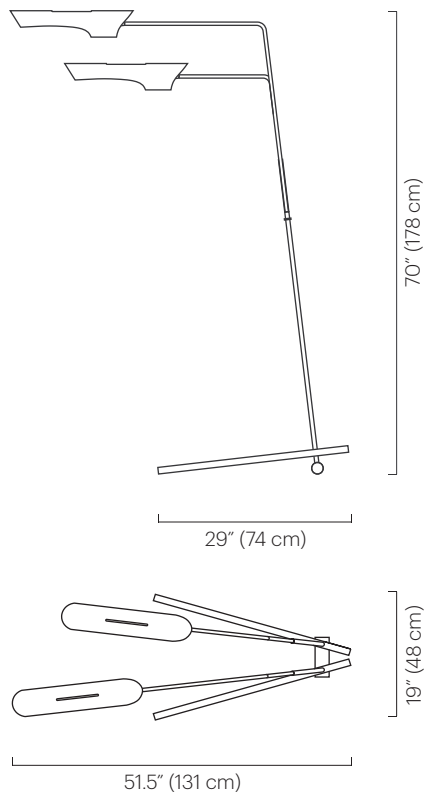

### Description

The Torroja Standing Lamp features a plated steel frame with two arms that extend over the base. Powder coated aluminum shades rotate 320° to cast light directionally.

### Materials

Shades: Powder coated aluminum  
Frame: Plated steel

### Shade Color

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

### Finish

- Polished Nickel

### Lamping

120V: (2)T10 tubular incandescent bulbs medium base 60W max  
220-240V: (2)E27 base (tubular 32mm suggested) 60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

### Wattage

120 watts max

### Weight

30 lbs (13.6 kg)

### Remarks

Available to be wired UL.  
Dimmer switch located on cord.  
Arm height is not adjustable.  
Cord color is black; length approx. 10 feet.  
Indoor use and dry locations only.

### Dimensions


Base: 19" W x 29" D  
(48 W x 74 cm D)  
70" H x 51.5" D  
(178 H x 131 cm D)  
Shade: 4" Ø x 18.5" L  
(10 Ø x 47 cm L)



David  
Weeks  
Studio

[www.DavidWeeksStudio.com](http://www.DavidWeeksStudio.com)

No. 316

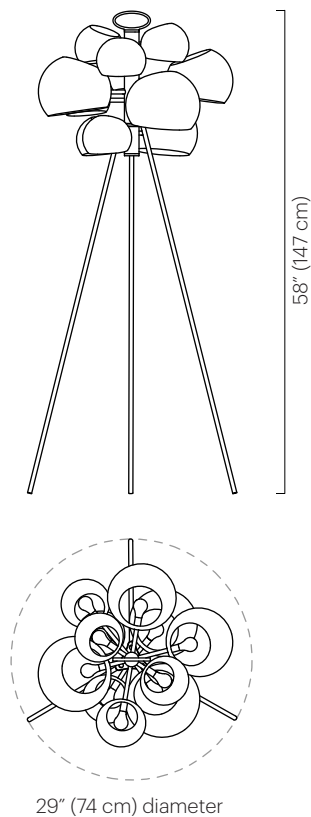

## Description

The Kopra Standing lamp features eleven Boi shades of various sizes on a three legged frame topped with an oval handle. Each shade rotates 320° to cast light directionally.

## Materials

Shades: Powder coated steel  
Frame: Powder coated steel

## Frame & Shade Color

- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)
- White Gloss (white gloss interior)

Custom colors available.

## Lamping

120V: (11)G16.5 globe bulb, candelabra base  
40W max, 20W recommended  
220-240V: (11)E14 base golf ball  
40W max, 20W recommended  
Note: Bulbs not included.  
Halogen bulbs not recommended.

## Wattage

440 watts max

## Weight

25 lbs (11.3 kg)

## Remarks

Not UL listed.  
Dimmer switch located on cord.  
Cord color is black;  
length approx. 10 feet.  
Indoor use & dry locations only.

## Dimensions

Approx diameter: 29" (74 cm)  
Height: 58" (147 cm)






# Fenta Standing Lamp

## TECHNICAL SPECIFICATIONS

No. 317

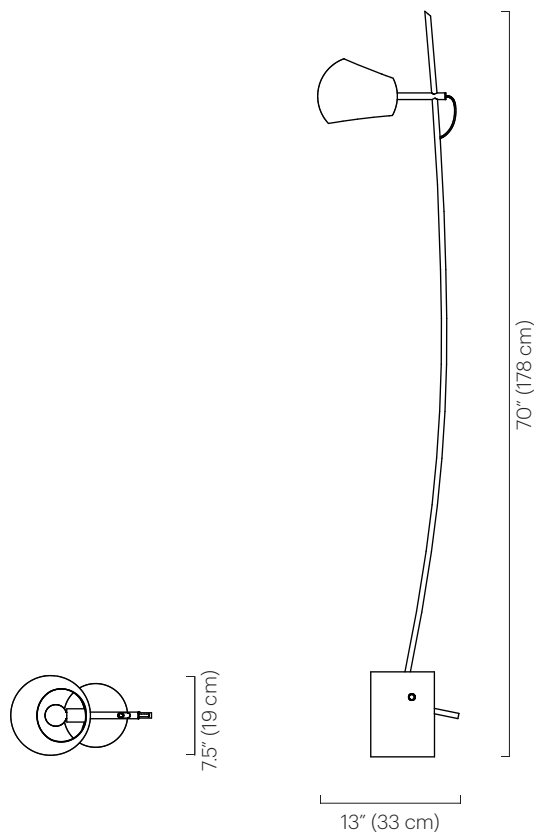

### Description

The Fenta lamp features a cylindrical cement cast base. The hand formed brass arm is secured by a wooden dowel. The Boi shade has two openings casting light both up and down.

### Materials

Shade: Powder coated steel  
Frame: Finished brass  
Base: Cement  
Dowel: Hardwood

### Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

### Base Color

- Natural Cement
- Darkened Cement

### Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

### Lamping

120V: G16.5 globe bulb  
candelabra base 60W max  
220-240V: E14 base golf ball  
60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

### Wattage

60 watts max

### Weight

20 lbs (9 kg)

### Remarks

Available to be wired UL.  
Dimmer switch located on cord.  
Cord color is black;  
length approx. 10 feet.  
Fixed shade does not swivel.  
Indoor use and dry locations only.

### Dimensions


13" D x 7.5" W x 70" H  
(33 D x 19 W x 178 cm H)  
Base: 6"Ø x 9" H  
(15 Ø x 23 cm H)  
Shade: 7.5" Ø x 6" H  
(19 Ø x 15 cm H)



David  
Weeks  
Studio

[www.DavidWeeksStudio.com](http://www.DavidWeeksStudio.com)

No. 318

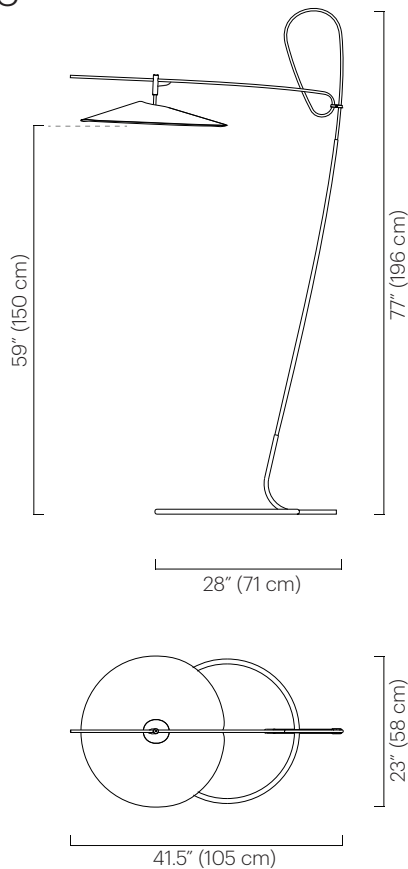

**Description**

The Treble Standing Lamp features a plated frame and a single Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with a glass diffuser.

**Materials**

Shade: Anodized or powder coated aluminum  
Frame: Plated steel and brass  
Lamp enclosure: Glass, aluminum, steel and plated brass.

**Shade Color**

Powder coated:  
● Black Satin (ivory satin interior)  
● Grey Gloss (ivory satin interior)  
● Ivory Satin (ivory satin interior)  
○ White Satin (white satin interior)

Custom colors available.

**Anodized:**

● Polished Black (matte gold interior)  
● Polished Black (red ombre interior)

**Finish**

● Brushed Brass  
● Polished Nickel

Custom finishes available.

**Lamping**

LED: Warm white 2700K  
Lumens: 825 (equivalent to one 60W incandescent bulb)  
CRI: 90+  
54,000 LED life hours (approx.)

**Voltage / Wattage**

120V (Direct Voltage) / 10W

**Weight**

20 lbs (9 kg)

**Remarks**

Fixture is not UL listed.  
Arm length is fixed.  
Shade does not rotate.  
Hardware finish consistent with frame finish.  
Dimmer switch located on cord.  
Cord color is black; length approx. 10 feet.  
Indoor use and dry locations only.

**Dimensions**


41.5" D x 23" W x 77" H  
(105 D x 58 W x 196 cm H)  
Shade: 23" Ø x 4" H  
(58 Ø x 10 cm H)



# Hanging Mobile

## TECHNICAL SPECIFICATIONS

No. 405

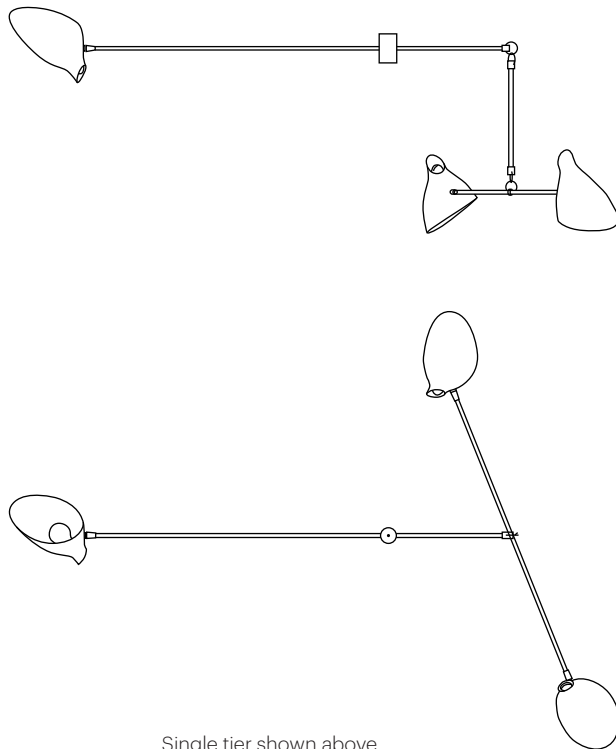

Single tier shown above



Shown above with three tiers

### Description

The Hanging Mobile is a totally customizable fixture. The quantity and size of the tiers can be specified for site conditions. Each tier is comprised of three segments, with three shades that balance on an asymmetrical axis that allows gentle movement. Large bottle shades rotate 320° to cast light directionally.

### Materials

Shades: Powder coated aluminum  
Ceiling mount: Powder coated steel  
Frame: Plated steel  
Hub: Plated aluminum (for nickel finish) or brass (for brass finish)  
Drop: Stainless steel cable

### Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

### Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

### Lamping (Three shades per tier)

120V: (3)A19 or A15  
medium base 60W max  
220-240V: (3)E27 base 60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

IMPORTANT: Identical bulbs must be used in each socket in order for fixture to properly balance.

### Wattage

180 watts max per tier

### Weight

Weight varies; depending on number of tiers and dimensions.  
Each tier: approx. 8-10 lbs (3.6-4.5 kg)

### Remarks

Specify drop length.  
Approx. 6" of extra cable and cord included.

### Remarks continued

Specify number of tiers.  
Two tier minimum (six shades).  
Each tier has three shades.  
Specify tier diameter.  
Ceiling mount consistent with shade color.  
White electrical cord is standard.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

### Dimensions


Fixture custom made based on client specifications.  
Minimum diameter: 60" (152 cm)  
Maximum diameter: 120" (305 cm)  
Ceiling mount diameter: 5" (13 cm)  
Minimum overall height:  
Two tiers: 28" (71 cm)  
Three tiers: 35" (89 cm)  
Shade: 13.5" L x 7" W x 9" D (34 L x 18 W x 23 cm D)



**David  
Weeks  
Studio**

[www.DavidWeeksStudio.com](http://www.DavidWeeksStudio.com)

No. 407

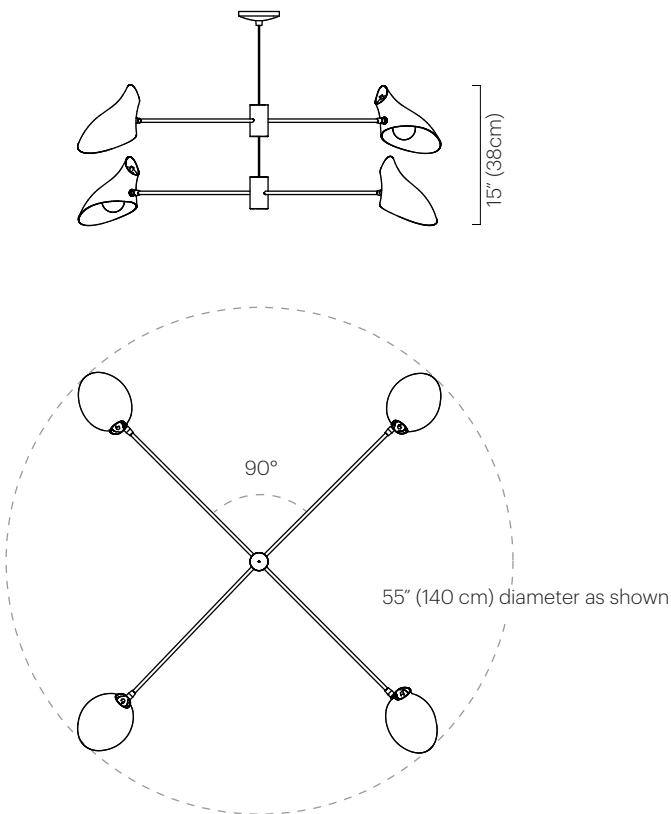

Shown above with two tiers

### Description

The Cross Cable features a plated frame and handspun Bottle shades that rotate 320° to cast light directionally. Customizable with longer or shorter tiers. Additional tiers can be added.

### Materials

Shades: Powder coated aluminum  
Ceiling Mount: Powder coated steel  
Frame: Plated steel  
Hub: Plated aluminum and brass  
Drop: Stainless steel cable

### Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

### Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

### Lamping (Two shades per tier)

120V: (2)A19 or A15 medium base 60W max  
220-240V: (2)E14 base 60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

IMPORTANT: Identical bulbs must be used in each socket in order for fixture to properly balance.

### Wattage

120 watts max per tier

### Weight

Weight varies; depending on number of tiers and dimensions.  
Two-tier fixture: approx. 9 lbs (4 kg)

### Remarks

Specify drop length.  
Approx. 6" of extra cable and cord included.  
Specify tier length.  
Specify number of tiers.

### Remarks continued

Two tier minimum (Four shades).  
Each tier has two shades.  
Ceiling mount consistent with shade color.  
White electrical cord is standard.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.


### Dimensions

Standard tier length: 55" x 55" (140 x 140 cm)  
Tier length can be customized between 36 - 96" (91 - 244 cm)  
Ceiling mount diameter: 5" (13 cm)  
Standard distance between tiers: 7" (18 cm)  
Minimum overall height: 15" (38 cm)  
Shade: 8.5" H x 6" W 8.5" D (22 H x 15 W x 22 cm D)



# 411 Luce - with plug

## TECHNICAL SPECIFICATIONS

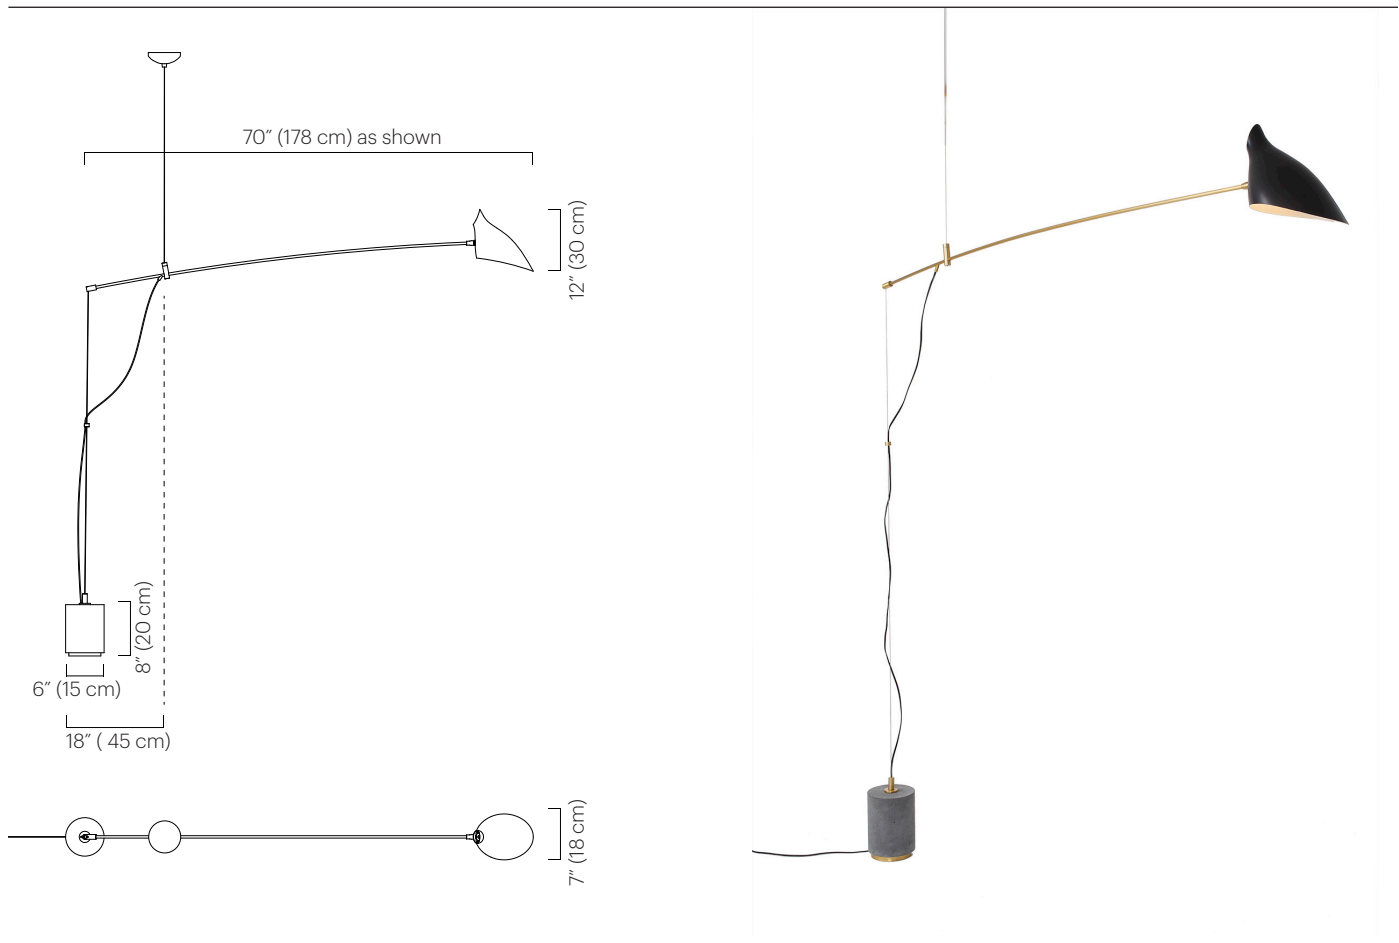

### Description

The Luce is a floor to ceiling cable suspended fixture featuring a cantilevered arm anchored by a cast cement base. Angle of arm is adjustable on site. Available with a plug or hardwired. The large bottle shade rotates 320° to cast light directionally.

### Materials

Shades: Powder coated aluminum  
Frame: Plated brass and steel  
Base: Cement, plated brass and steel  
Canopy: Powder coated steel

### Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

### Base Color

- Natural Cement
- Darkened Cement

### Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

### Lamping

120V: A19 or A15  
medium base 60W max  
220-240V: E27 base 60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

### Wattage

60 watts max

### Weight

17 lb (7.7 kg)

### Remarks

Not UL Listed.  
Specify drop length.  
Custom Arm Length available: 48"-70" (122-178 cm)  
Hardware finish consistent with frame finish.  
Ceiling Mount consistent with shade color.  
Additional weight support recommended for ceiling mount.  
Dimmer switch on cord.  
Cord color is black, length approx. 10 feet from base.  
Indoor use and dry locations only.


### Dimensions

Arm: 70" L x 7" W (178 L x 18 cm W)  
Height adjustable on site  
Base: 6" Ø x 8" H (15 Ø x 20 cm H)  
Shade: 13.5" L x 7" W x 9" D  
(34 L x 18 W x 23 cm D)



**David  
Weeks  
Studio**

[www.DavidWeeksStudio.com](http://www.DavidWeeksStudio.com)

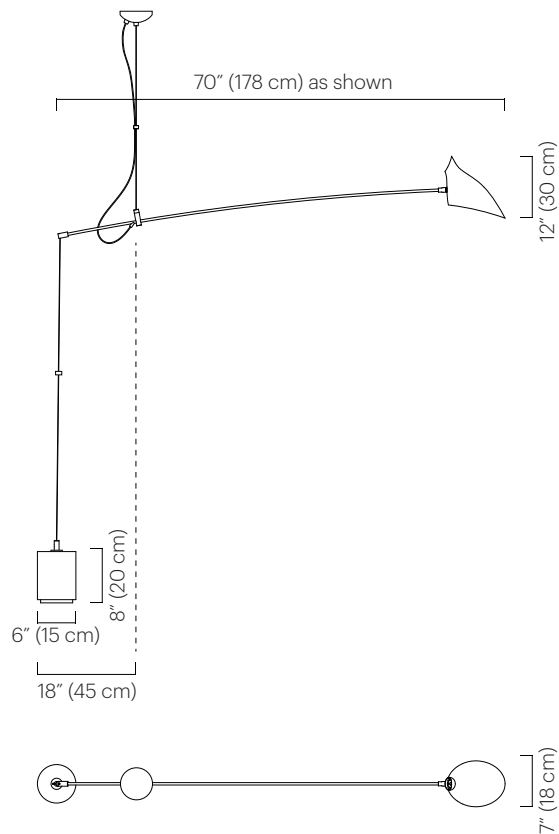**Description**

The Luce is a floor to ceiling cable suspended fixture featuring a cantilevered arm anchored by a cast cement base. Angle of arm is adjustable on site. Available hardwired or with a plug. The large bottle shade rotates 320° to cast light directionally.

**Materials**

Shades: Powder coated aluminum  
Frame: Plated brass and steel  
Base: Cement, plated brass and steel  
Canopy: Powder coated steel

**Shade Color**

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

**Base Color**

- Natural Cement
- Darkened Cement

**Finish**

- Polished Nickel
- Brushed Brass

Custom finishes available.

**Lamping**

120V: A19 or A15  
medium base 60W max  
220-240V: E27 base 60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

**Wattage**

60 watts max

**Weight**

17 lb (7.7 kg)

**Remarks**


Specify drop length.  
Custom Arm Length available: 48"-70" (122-178 cm)  
Hardware finish consistent with frame finish.  
Ceiling Mount consistent with shade color.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

**Dimensions**

Arm: 70" L x 7" W (178 L x 18 cm W)  
Height adjustable on site  
Base: 6" Ø x 8" H (15 Ø x 20 cm H)  
Shade: 13.5" L x 7" W x 9" D  
(34 L x 18 W x 23 cm D)



No. 418

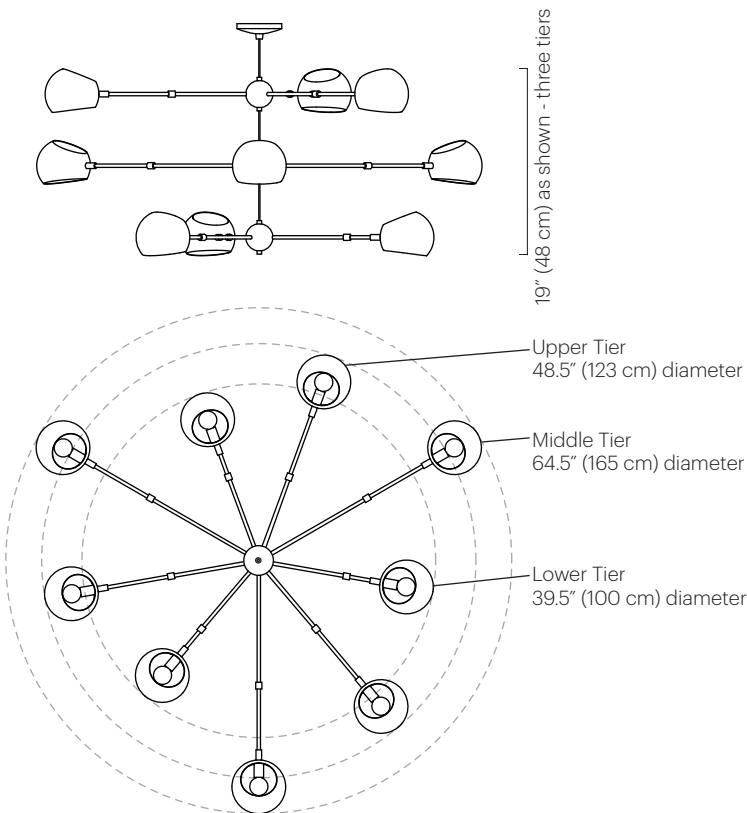

Shown above with three tiers

### Description

The Tri Boi is a highly customizable fixture, offering an expanding number of tiers with varying dimensions. Each tier has three arms made of plated steel and rotating Boi shades with openings at the top and bottom. Shades rotate 320° to cast light directionally.

### Materials

Shades: Powder coated steel  
Ceiling mount: Powder coated steel  
Frame: Plated steel  
Hubs: Plated brass  
Drop: Stainless steel cable

### Shade Color

- Black Gloss (black gloss interior)
- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- White Gloss (white gloss interior)
- White Satin (white satin interior)

Custom colors available.

### Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

### Lamping (Three shades per tier)

120V: (3)G16.5 globe bulb  
candelabra base 60W max  
220-240V: (3)E14 base golf ball  
60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

### Wattage

180 watts max per tier

### Weight

Weight varies; depending on  
number of tiers and dimensions.  
3-tier fixture: approx. 15 lbs (7 kg)

### Remarks

Specify drop length.  
Approx. 6" of extra cable  
and cord included.  
Specify number of tiers.  
Two tier minimum (six shades).  
Each tier has three shades.  
Tiers may be specified with  
different diameters.

### Remarks continued


Ceiling mount consistent  
with shade color.  
White electrical cord is standard.  
Additional weight support  
recommended for junction  
box installation.  
Indoor use and dry locations only.

### Dimensions


Tiers are available in four  
standard diameters:  
39.5" / 48.5" / 56.5" / 64.5"  
(100 cm / 123 cm / 144 cm / 164 cm)  
or specify custom tier diameters.  
Min. diameter of tier: 24" (61 cm)  
Max. diameter of tier: 72" (183 cm)  
Ceiling mount diameter: 5" (13 cm)  
Standard distance  
between tiers: 7" (18 cm)  
Minimum overall height:  
Two tiers: 13" (33 cm)  
Three tiers: 20" (51 cm)  
Shade: 6" Ø x 5.5" H  
(15 Ø x 14 cm H)



No. 419

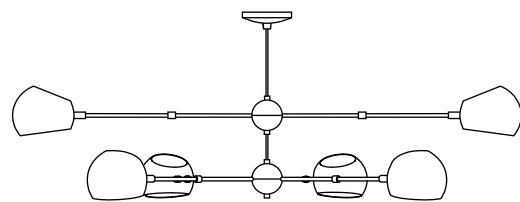

12" (30 cm) as shown

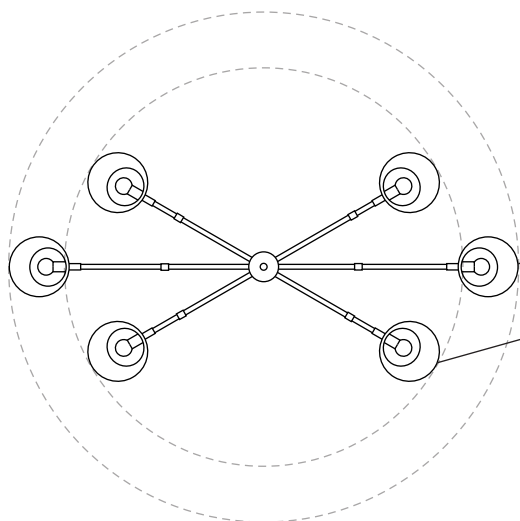

Upper:  
56.5" (144 cm) diameter

Lower:  
48.5" (123 cm) diameter



### Description

The oval boi is a two tier fixture with six shades. The top tier has two shades, and the Bottom tier has four shades creating an oval shape when viewed from below. Shades rotate 320° to cast light directionally. Tiers are available in three diameters; they can also be customized to client specifications.

### Materials

Shades: Powder coated steel  
Ceiling mount: Powder coated steel  
Frame: Plated steel  
Hubs: Plated brass  
Drop: Stainless steel cable

### Shade Color

- Black Gloss (black gloss interior)
- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- Orange Gloss (ivory satin interior)
- White Gloss (white gloss interior)
- White Satin (white satin interior)

Custom colors available.

### Standard Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

### Lamping

120V: (6)G16.5 globe bulb  
candelabra base 60W max  
220-240V: (6)E14 base golf ball  
60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

### Wattage

360 watts max

### Weight

Approx. 10 lbs (4.5 kg)

### Remarks

Specify drop length.  
Approx. 6" of extra cable  
and cord included.  
Only available in two tiers.  
Specify tier diameter.  
Ceiling mount color matches  
specified shade.  
White electrical cord is standard.

### Remarks continued

Additional weight support  
recommended for junction  
box installation.  
Indoor use and dry locations only.



### Dimensions

Available in standard diameters:  
Upper tier: 48.5" / 56.5" / 64.5"  
(123 cm / 144 cm / 164 cm)  
Lower tier: 39.4" / 48.5" / 56.5" / 64.5"  
(100 cm / 123 cm / 144 cm / 164 cm)  
or specify custom tier diameters.  
Min. diameter of tier: 24" (61 cm)  
Max. diameter of tier: 72" (183 cm)  
Standard distance  
between tiers: 7" (18 cm)  
Ceiling mount diameter: 5" (13 cm)  
Minimum overall height: 13" (33 cm)  
Shade: 6" Ø x 5.5" H  
(15 Ø x 14 cm H)





No. 424

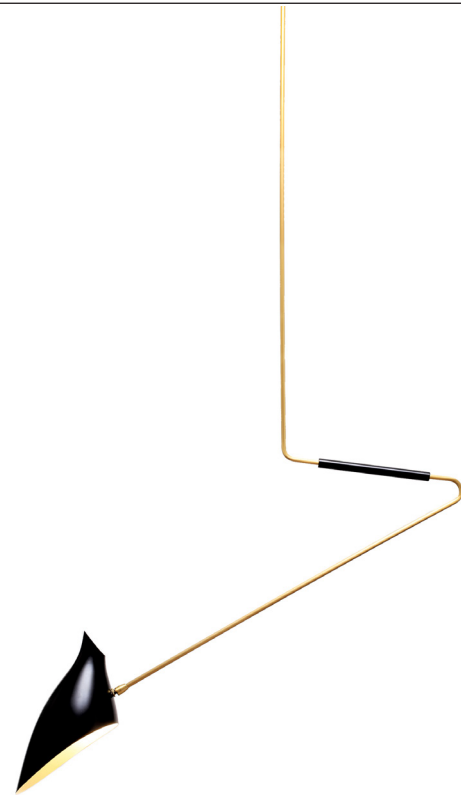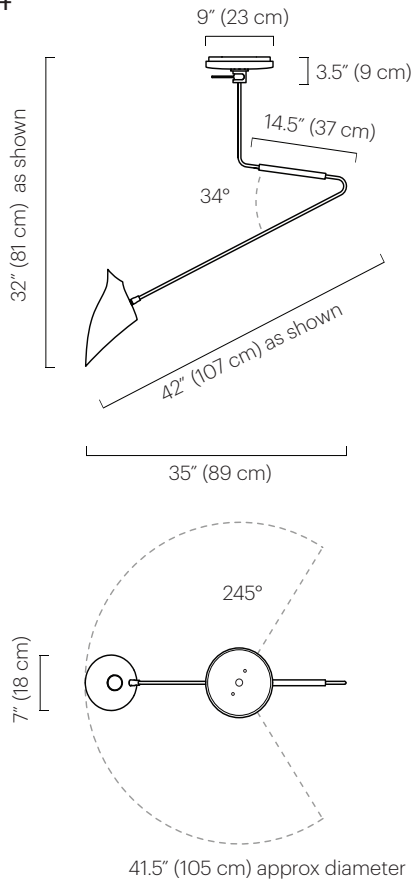**Description**

The bent frame of the Akimbo is balanced by a single shade and counterweight. The large bottle shade rotates 320° to cast light directionally. The drop also has a 245° range of rotation from the canopy.

**Materials**

Frame: Plated brass  
Shades: Powder coated aluminum  
Counterweight: Powder coated steel  
Ceiling mount: Powder coated and plated aluminum

**Shade Color**

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

**Frame Color**

- Brushed Brass
- Polished Nickel

Custom finishes available.

**Lamping**

120V: A19 medium base  
60W max  
220-240V: E27 base 60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

**Wattage**

60 W max

**Weight**

5 lbs (2.3 kg)

**Remarks**

Specify drop length.  
Fixed drop not adjustable on site.  
Ceiling mount consistent with shade color.  
Hardware finish consistent with frame finish.  
Counterweight is black.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

**Dimensions:**



35" D x 7" W x 26.5" H  
(89 D x 18 W x 67 cm H)  
Canopy mount: 9" Ø x 3.5" H  
(23 Ø x 9 cm H)  
Max overall drop: 169"  
(429 cm)  
Min. overall drop: 32"  
(81 cm)  
Shade: 13.5" L x 7" W x 9" D  
(34 L x 18 W x 23 cm D)



# Torroja Cross

## TECHNICAL SPECIFICATIONS

No. 425

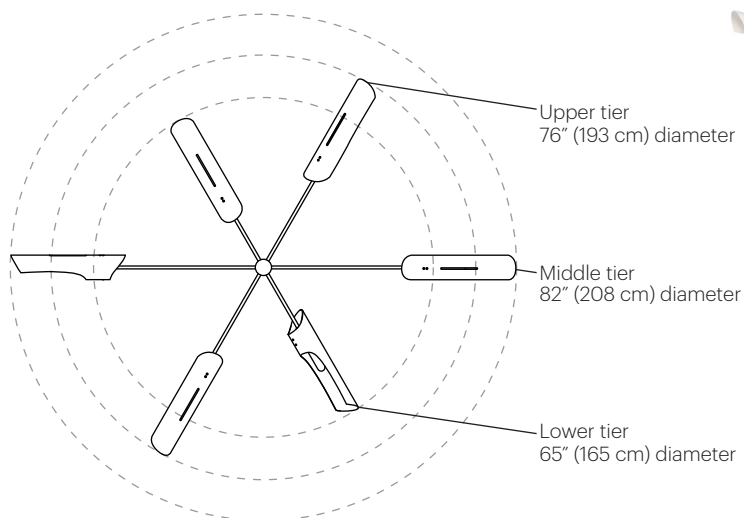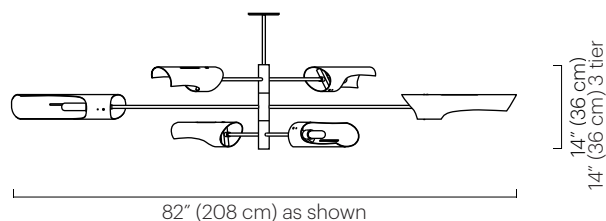

Shown above with three tiers

### Description

The Torroja Cross features a plated frame customizable by the number and length of the tiers. Each tier consists of two shades. Tiers scissor open and are adjustable on site. Shades rotate 320° to cast light directionally.

### Materials

Shades: Powder coated aluminum  
Frame: Plated steel  
Ceiling mount: Powder coated steel  
Drop: Plated steel

### Shade Color

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

### Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

### Lamping (Two shades per tier)

120V: (2)T10 tubular incandescent medium base 60W max  
220-240V: (2)E27 base (tubular 32mm suggested) 60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

### Wattage

120 watts max per tier

### Weight

Weight varies; depending on number of tiers and dimensions.  
3-tier fixture: approx. 18 lbs (8 kg)

### Remarks

Specify drop length.  
Fixed drop not adjustable on site.  
Specify number of tiers.  
Two tier minimum (four shades).  
Each tier has two shades.  
Specify tier lengths.  
Ceiling mount consistent with shade color.

### Remarks continued

Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

### Dimensions



Standard tier diameters:  
52" / 65" / 76" / 82"  
(132 cm / 165 cm / 193 cm / 208 cm)  
or specify custom tier diameters.  
Min. length of tier: 48" (122 cm)  
Max. length of tier: 120" (305 cm)  
Shade: 4" Ø x 18.5" L  
(10 Ø x 47 cm L)  
Ceiling mount diameter: 5" (13 cm)  
Minimum overall height:  
Two tiers: 11" (28 cm)  
Three tiers: 15.5" (39 cm)



**David  
Weeks  
Studio**

[www.DavidWeeksStudio.com](http://www.DavidWeeksStudio.com)

No. 427

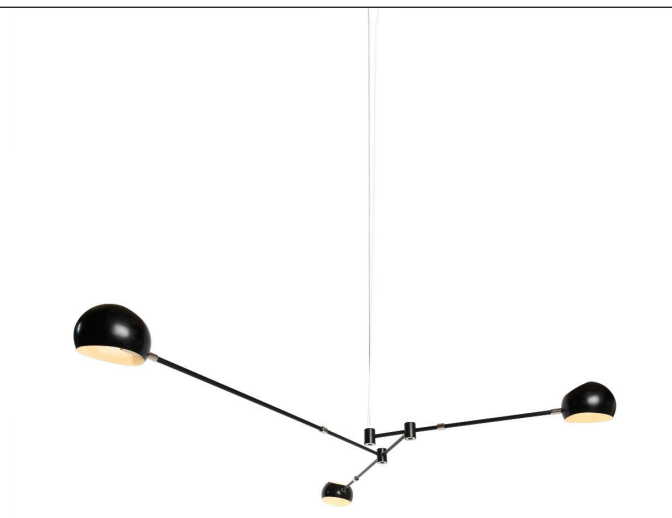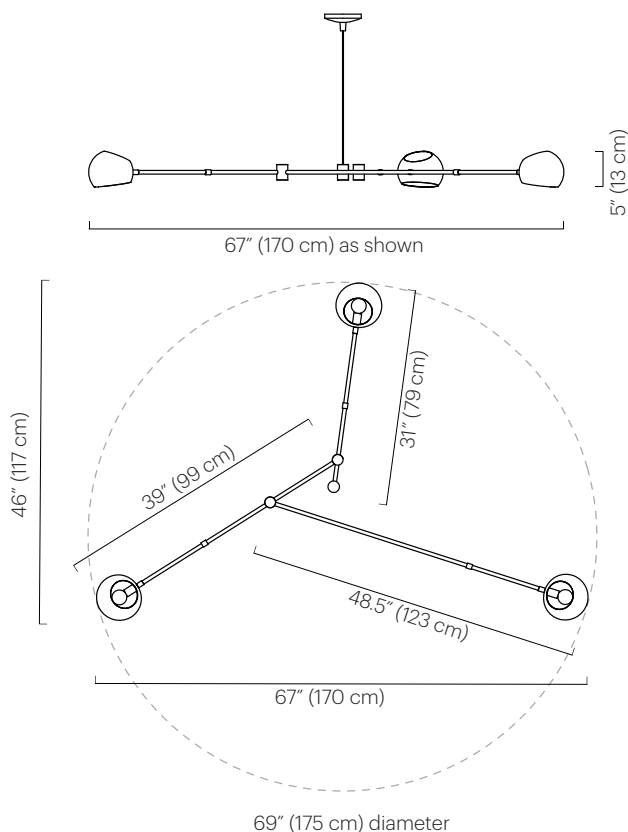**Description**

The Oseo is an asymmetrical, balanced fixture with a Boi shade extending from each of its three arms. Shades rotate 320° to cast light directionally.

**Materials**

Shades: Powder coated steel  
 Frame: Powder coated steel  
 Ceiling mount: Powder coated steel  
 Drop: Stainless steel cable  
 Hardware: Plated steel and brass

**Mount, Frame & Shade Color**

- Black Satin (ivory satin interior)
- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

**Hardware**

- Polished Nickel
- Brushed Brass

Custom finishes available.

**Lamping**

120V: (3)G16.5 globe bulb  
 220-240V: (3)E14 base golf ball  
 60W max  
 Note: Bulbs not included.  
 Halogen bulbs not recommended.

**Wattage**

180 watts max

**Weight**

10 lbs (4.5 kg)

**Remarks**

Specify drop length.  
 Approx. 6" of extra cable and cord included.  
 Fixture size cannot be customized.  
 Arm positions are fixed.  
 Ceiling mount consistent with shade color.

**Remarks continued**


White electrical cord is standard.  
 Hardware includes counterweights, swivels, and caps of hubs.  
 Additional weight support recommended for junction box installation.  
 Indoor use and dry locations only.

**Dimensions**

Fixture diameter: 69" (175 cm)  
 Fixture height: 5" (13 cm)  
 Ceiling mount diameter: 5" (13 cm)  
 Arm lengths: 48.5" / 39" / 31"  
 (123 cm / 99 cm / 79 cm)  
 Minimum overall height: 7" (18 cm)  
 Shade: 6" Ø x 5.5" H  
 (15 Ø x 14 cm H)



No. 428

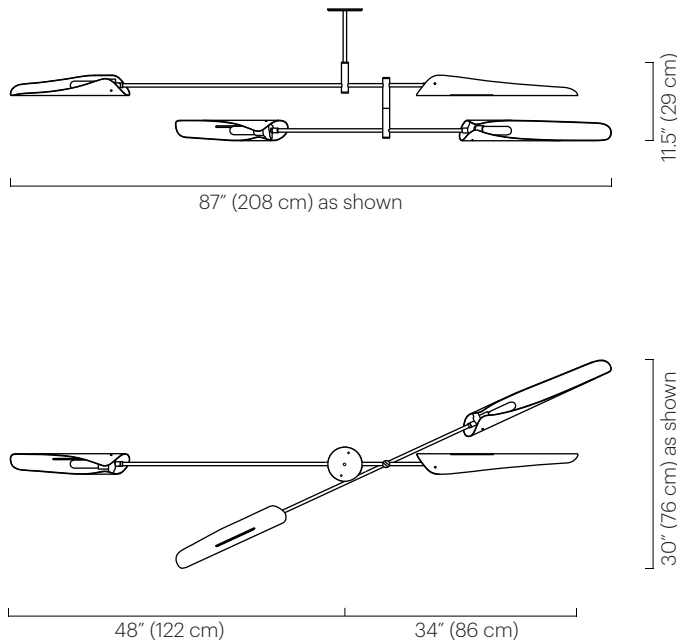

**Description**

The Sarus Mobile is a carefully balanced fixture, featuring two tiers of differing lengths. Each tier has one large and one small Sarus shade. Tiers scissor open when installed; arrangement is adjustable on site. Shades swivel 320° to cast light directionally.

**Materials**

Shades: Powder coated aluminum  
Frame: Plated steel  
Ceiling mount: Powder coated steel  
Drop: Plated steel

**Shade Color**

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

**Finish**

- Polished Nickel
- Brushed Brass

Custom finishes available.

**Lamping**

120V: (4)T10 tubular incandescent medium base 60W max  
220-240V: (4)E27 base (tubular 32mm suggested) 60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

**Wattage**

240 watts max

**Weight**

15 lbs (6.8 kg)

**Remarks**



Specify drop length.  
Fixed drop not adjustable on site.  
Tier lengths cannot be customized.  
Each tier has two shades.  
Ceiling mount consistent with shade color.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

**Dimensions**

Tier 1: 82" (208 cm)  
Tier 2: 69" (175 cm)  
Ceiling mount diameter: 5" (13 cm)  
Minimum overall height: 12.5" (32 cm)  
Large Shade: 23" L x 3" Ø (58 L x 8 Ø cm)  
Small Shade: 18" L x 3" Ø (46 L x 8 Ø cm)



No. 428

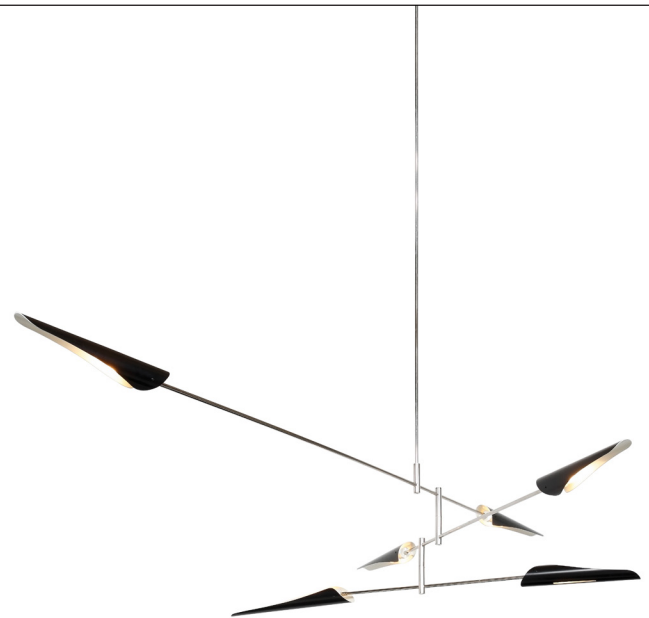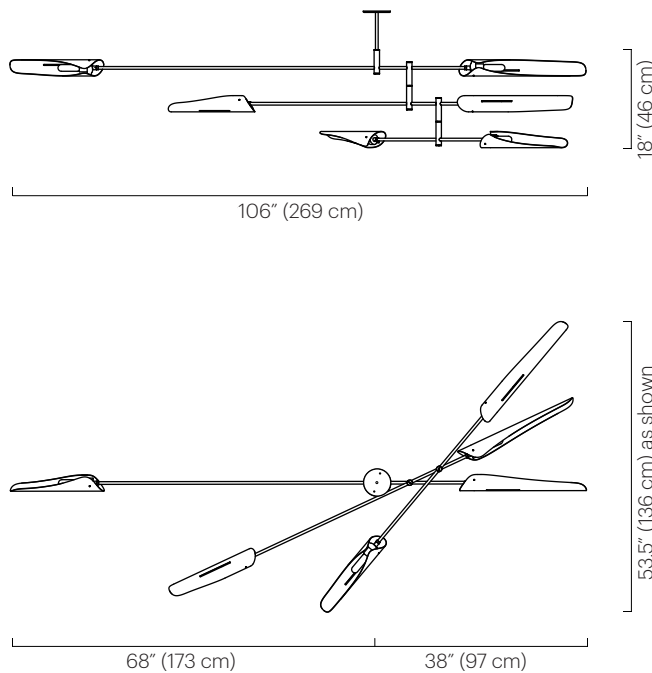

### Description

The Sarus Mobile is a carefully balanced fixture, featuring three tiers of differing lengths. Each tier has one large and one small Sarus shade. Tiers scissor open when installed; arrangement is adjustable on site. Shades swivel 320° to cast light directionally.

### Materials

Shades: Powder coated aluminum  
Frame: Plated steel  
Ceiling mount: Powder coated steel  
Drop: Plated steel

### Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

### Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

### Lamping

120V: (6) T10 tubular incandescent medium base 60W max  
220-240-V: (6) E27 base (tubular 32mm suggested) 60W max  
Note: Bulbs not included. Halogen bulbs not recommended.

### Wattage

360 watts max

### Weight

25 lbs (11.3 kg)

### Remarks

Specify drop length.  
Fixed drop not adjustable on site.  
Tier lengths cannot be customized.  
Due to the length of tiers, a natural arc occurs on the longest tier.

### Remarks continued

Each tier has two shades.  
Ceiling mount consistent with shade color.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

### Dimensions




Tier 1: 106" (269 cm)  
Tier 2: 82" (208 cm)  
Tier 3: 69" (175 cm)  
Ceiling mount diameter: 5" (13 cm)  
Minimum overall height: 19" (48 cm)  
Large Shade: 23" L x 3" Ø (58 L x 8 Ø cm)  
Small Shade: 18" L x 3" Ø (46 L x 8 Ø cm)



# Sarus Mobile, 4 Tier

## TECHNICAL SPECIFICATIONS

No. 428

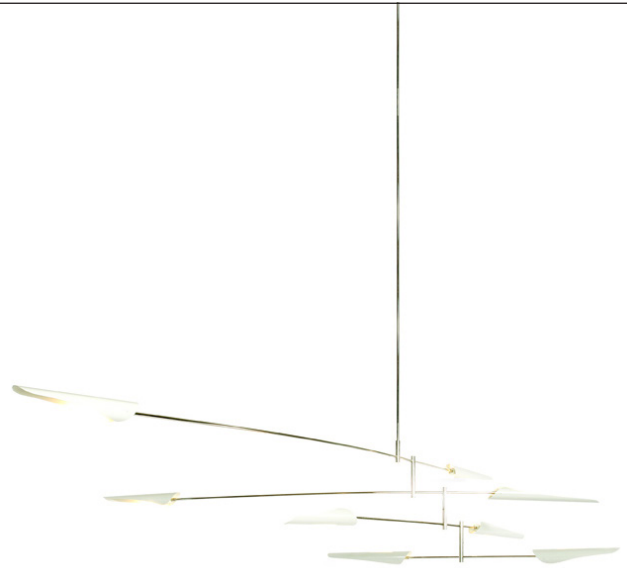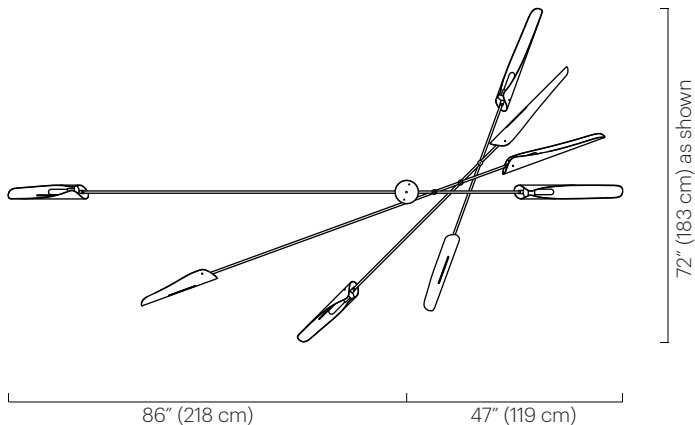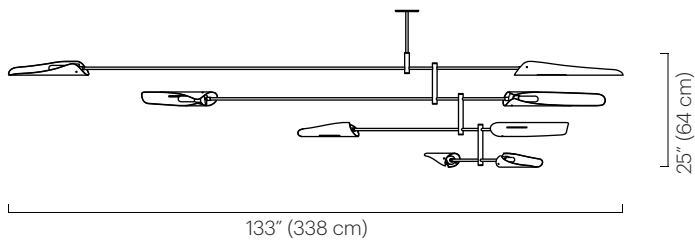

### Description

The Sarus Mobile is a carefully balanced fixture, featuring four tiers of differing lengths. Each tier has one large and one small Sarus shade. Tiers scissor open when installed; arrangement is adjustable on site. Shades swivel 320° to cast light directionally.

### Materials

Shades: Powder coated aluminum  
Frame: Plated steel  
Ceiling mount: Powder coated steel  
Drop: Plated steel

### Mount & Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

### Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

### Lamping

120V: (8)T10 tubular incandescent medium base 60W max  
220-240V: (8)E27 base (tubular 32mm suggested) 60W max  
Note: Bulbs not included. Halogen bulbs not recommended.

### Wattage

480 watts max

### Weight

35 lbs (15.8 kg)

### Remarks

Specify drop length.  
Fixed drop not adjustable on site.  
Tier lengths cannot be customized.  
Due to the length of tiers, a natural arc occurs on the two longest tiers.

### Remarks continued

Each tier has two shades. Ceiling mount consistent with shade color. Additional weight support recommended for junction box installation. Indoor use and dry locations only.

### Dimensions


Tier 1: 133" (338 cm)  
Tier 2: 106" (269 cm)  
Tier 3: 82" (208 cm)  
Tier 4: 69" (175 cm)  
Ceiling mount diameter: 5" (13 cm)  
Minimum overall height: 26" (66 cm)  
Large Shade: 23" L x 3" Ø (58 L x 8 Ø cm)  
Small Shade: 18" L x 3" Ø (46 L x 8 Ø cm)



**David  
Weeks  
Studio**

[www.DavidWeeksStudio.com](http://www.DavidWeeksStudio.com)

No. 429

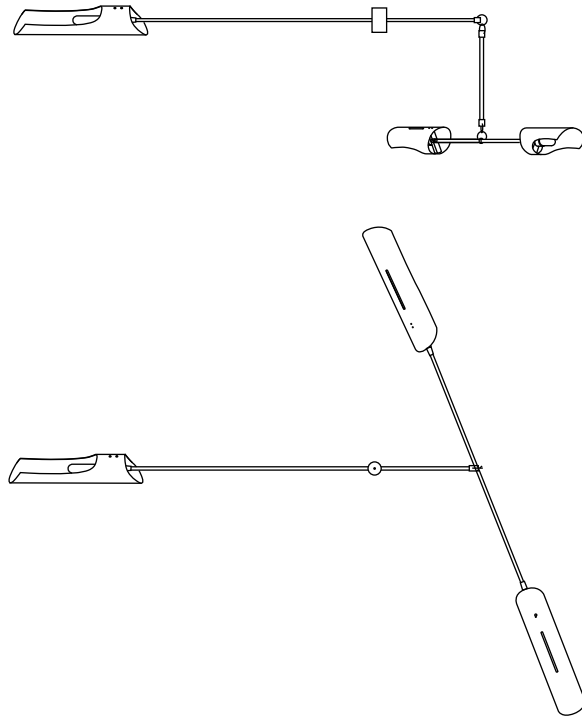

Single tier shown above



Shown above with three tiers

### Description

The Torroja Mobile is a totally customizable fixture. The quantity and size of the tiers can be specified for site conditions. Each tier is comprised of three segments, with three shades that balance on an asymmetrical axis that allows gentle movement. Torroja shades rotate 320° to cast light directionally.

### Materials

Shades: Powder coated aluminum  
Ceiling mount: Powder coated steel  
Frame: Plated steel  
Hub: Plated aluminum (for nickel finish) or brass (for brass finish)  
Drop: Stainless steel cable

### Shade Color

- Black Satin (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

### Finish

- Polished Nickel
- Brushed Brass

Custom finishes available.

### Lamping (Three shades per tier)

120V: (3) T10 tubular incandescent medium base 60W max  
220-240V: (3) E27 base (tubular 32mm suggested) 60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

IMPORTANT: Identical bulbs must be used in each socket in order for fixture to properly balance.

### Wattage

180 watts max per tier

### Weight

Weight varies; depending on number of tiers and dimensions.  
Each tier: approx. 8-10 lbs (3.6-4.5 kg)

### Remarks



Specify drop length.  
Approx. 6" of extra cable and cord included.  
Specify number of tiers.  
Two tier minimum (six shades).  
Each tier has three shades.  
Specify tier diameter.  
Ceiling mount consistent with shade color.  
White electrical cord is standard.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

### Dimensions

Fixture custom made based on client specifications.  
Minimum diameter: 60" (152 cm)  
Maximum diameter: 120" (305 cm)  
Ceiling mount diameter: 5" (13 cm)  
Minimum overall height:  
Two tiers: 24" (61 cm)  
Three tiers: 31" (79 cm)  
Shade: 4" Ø x 18.5" L  
(10 Ø x 47 cm L)



No. 430

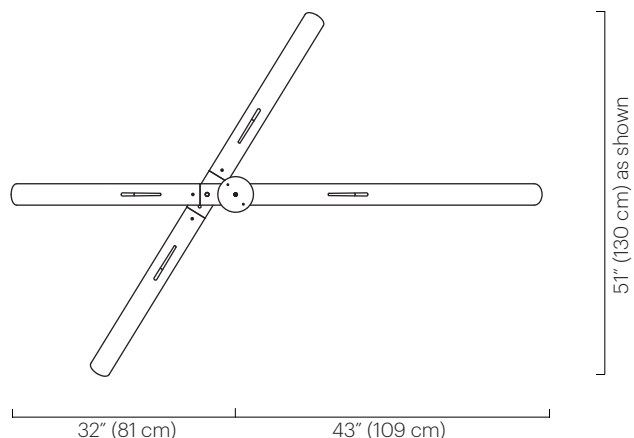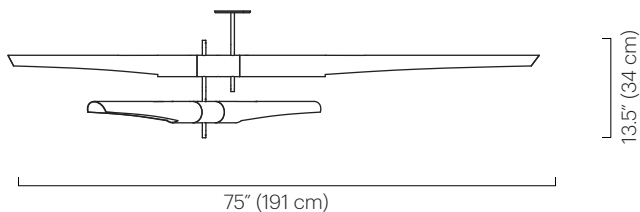

### Description

The Hennen Mobile is a balanced fixture comprised of two offset tiers with a total of three short and one long shade that can be set to cast light up or down. Tiers scissor open when installed and arrangement is adjustable on site.

### Materials

Shades: Powder coated aluminum  
Frame: Plated steel & aluminum  
Ceiling mount: Powder coated steel  
Drop: Plated steel

### Shade Color

- White Gloss (white gloss interior)
- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)

Custom colors available.

### Finish

- Polished Nickel

### Lamping

120V: (4)T10 incandescent tubular medium base 60W max  
220-240V: (4)E27 base (tubular 32mm suggested) 60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

### Wattage

240 watts max

### Weight

15 lbs (6.8 kg)

### Remarks

Specify drop length.  
Fixed drop not adjustable on site.  
Tier lengths cannot be customized.  
Ceiling mount consistent with shade color.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.


### Dimensions

Upper tier: 75" (191 cm)  
Lower tier: 59" (150 cm)  
Ceiling mount diameter: 5" (13 cm)  
Minimum overall height: 14.5" (37 cm)  
Long shade: 3" Ø x 42" L (8 Ø x 107 cm L)  
Short shade: 3" Ø x 26.5" L (8 Ø x 67 cm L)





No. 431

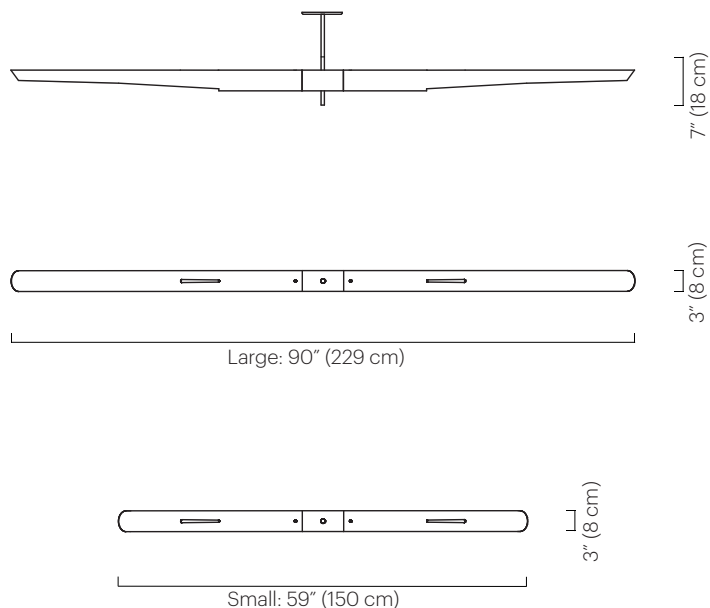

## Description

The Hennen Solo is comprised of two shades suspended from a central drop. The Solo is offered in two sizes, each shade can be set to cast light up or down. This fixture also works well when installed in multiples.

## Materials

Shades: Powder coated aluminum  
Frame: Plated steel & aluminum  
Ceiling mount: Powder coated steel  
Drop: Plated steel

## Shade Color

- White Gloss (white gloss interior)
- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)

Custom colors available.

## Finish

- Polished Nickel

## Lamping

120V: (2)T10 incandescent tubular medium base 60W max  
220-240V: (2)E27 base (tubular 32mm suggested) 60W max  
Note: Bulbs not included. Halogen bulbs not recommended.

## Wattage

120 watts max

## Weight

10 lbs (4.5 kg)

## Remarks



Specify drop length.  
Fixed drop not adjustable on site.  
Specify fixture length.  
Ceiling mount consistent with shade color.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

## Dimensions

Fixture length options:  
Large: 90" (229 cm)  
Small: 59" (150 cm)  
Ceiling mount diameter: 5" (13 cm)  
Minimum overall height: 8" (20 cm)  
Long shade: 3" Ø x 42" L  
(8 Ø x 107 cm L)  
Short shade: 3" Ø x 26.5" L  
(8 Ø x 67 cm L)



No. 432

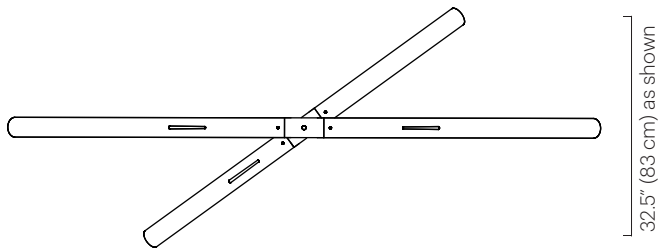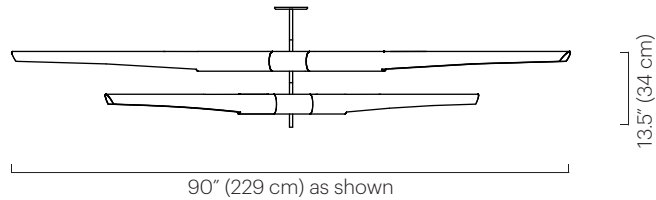

Shown above with 2 tiers

### Description

The Hennen Cross is a fixture comprised of two or more tiers on a central axis. Tiers are configured with large or small shades that can be set to cast light up or down. Tiers scissor open and are adjustable on site

### Materials

Shades: Powder coated aluminum  
Frame: Plated steel & aluminum  
Ceiling mount: Powder coated steel  
Drop: Plated steel

### Shade Color

- White Gloss (white gloss interior)
- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)

Custom colors available.

### Finish

- Polished Nickel

### Lamping (Two shades per tier)

120V: (2)T10 tubular incandescent medium base 60W max  
220-240V: (2)E27 base (tubular 32mm suggested) 60W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

### Wattage

120 watts max per tier

### Weight

Weight varies; depending on number of tiers and dimensions.  
2-tier fixture: approx 15 lbs (7 kg)

### Remarks

Specify drop length.  
Fixed drop not adjustable on site.  
Specify number of tiers.

### Remarks continued

Two tier minimum (four shades).  
Each tier has two shades.  
Specify tier lengths.  
Ceiling mount consistent with shade color.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

### Dimensions


Tier length options:  
Large tier: 90" (229 cm)  
Small tier: 59" (150 cm)  
Ceiling mount diameter: 5" (13 cm)  
Minimum overall height:  
Two tier: 14.5" (37 cm)  
Three tier: 21.25" (54 cm)  
Long shade: 3" Ø x 42" L  
(8 Ø x 107 cm L)  
Short shade: 3" Ø x 26.5" L  
(8 Ø x 67 cm L)



# Kopra Burst

## TECHNICAL SPECIFICATIONS

No. 433

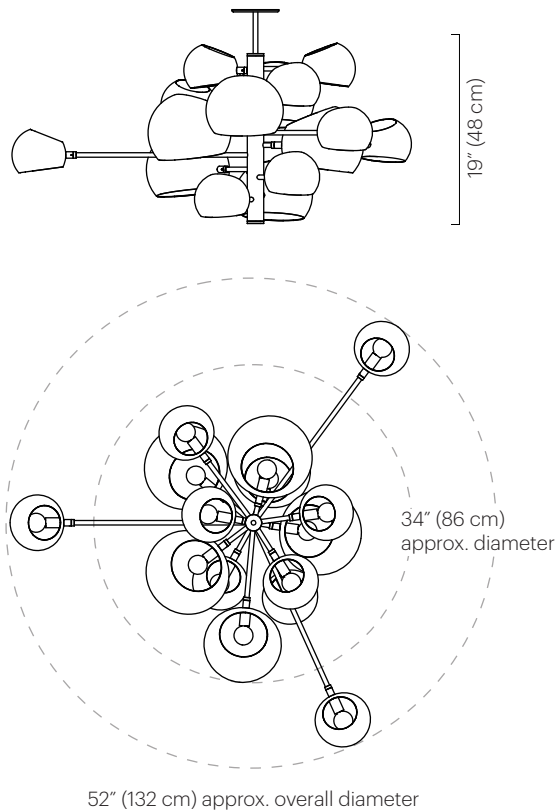

### Description

The Kopra Burst is a balanced fixture comprised of fifteen Boi shades of various sizes. The fixture is available fully powder coated or with a plated frame and powder coated shades. Each shade rotates 320° to cast light directionally.

### Materials

Shades: Powder coated steel  
Frame: Powder coated or plated steel  
Ceiling mount: Powder coated steel  
Drop: Powder coated or plated steel

### Mount & Shade Color

- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)
- White Gloss (white gloss interior)

### Frame

- Brushed Brass
- Polished Nickel
- Black Gloss
- Grey Gloss
- White Gloss

Custom colors and finishes available.

### Lamping

120V: (15)G16.5 globe bulb  
candelabra base  
40W max, 20W recommended  
220-240V: (15)E14 base golf ball  
40W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

### Wattage

600 watts max

### Weight

25 lbs (11.3 kg)

### Remarks

Specify drop length.  
Fixed drop not adjustable on site.  
Arm lengths are fixed.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

### Dimensions


Approx diameter: 52" (132 cm)  
Ceiling mount diameter: 5" (13 cm)  
Minimum overall height: 22" (56 cm)



**David  
Weeks  
Studio**

[www.DavidWeeksStudio.com](http://www.DavidWeeksStudio.com)

No. 434

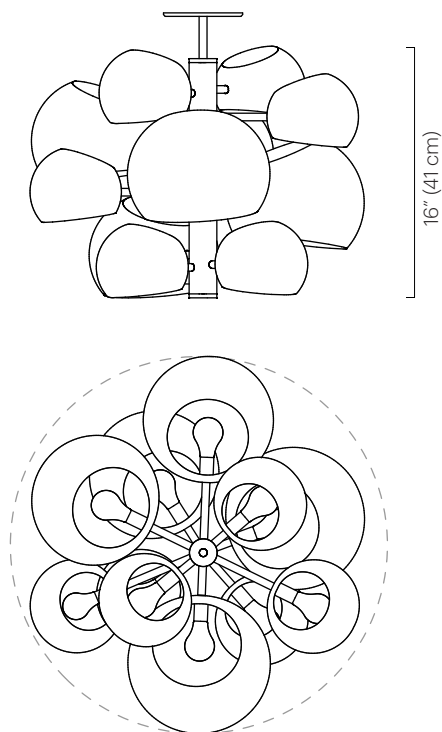

24" (61 cm) approx. diameter



### Description

The Kopra Cluster is a balanced fixture comprised of eleven Boi shades of various sizes. The fixture is available fully powder coated or with a plated frame and powder coated shades. Each shade rotates 320° to cast light directionally.

### Materials

Shades: Powder coated steel  
Frame: Powder coated or plated steel  
Ceiling mount: Powder coated steel  
Drop: Powder coated or plated steel

### Mount & Shade Color

- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)
- White Gloss (white gloss interior)

### Frame

- Brushed Brass
- Polished Nickel
- Black Gloss
- Grey Gloss
- White Gloss

Custom colors and finishes available.

### Lamping

120V: (11)G16.5 globe bulb  
candelabra base  
40W max, 20W recommended  
220-240V: (11)E14 base golf ball  
40W max  
Note: Bulbs not included. Halogen bulbs not recommended.

### Wattage

440 watts max

### Weight

20 lbs (9 kg)

### Remarks


Specify drop length.  
Fixed drop not adjustable on site.  
Arm lengths are fixed.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

### Dimensions

Approx diameter: 24" (61 cm)  
Ceiling mount diameter: 5" (13 cm)  
Minimum overall height: 19" (48 cm)



No. 435

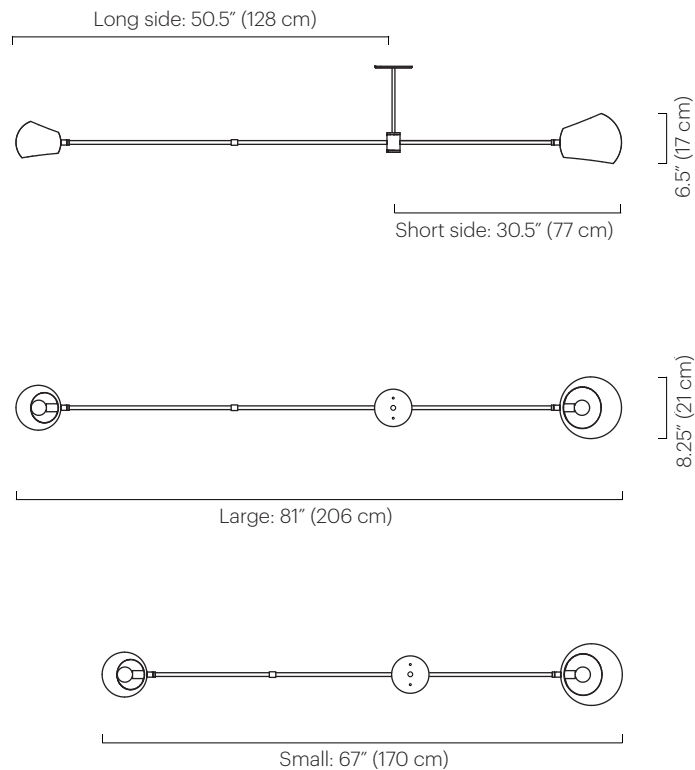**Description**

The Acaba is an asymmetrical fixture comprised of one large and one small Boi shade. Shades rotate 320° to cast light directionally. The Acaba is offered in two sizes and also works well when installed in multiples.

**Materials**

Shades: Powder coated steel  
 Frame: Powder coated steel  
 Ceiling mount: Powder coated steel  
 Drop: Powder coated steel

**Mount, Frame & Shade Color**

- Black Gloss (black gloss interior)
- Grey Gloss (grey gloss interior)
- White Gloss (white gloss interior)

Custom colors available.

**Lamping**

120V: (1)A19 or A15 medium base bulb and (1)G16.5 globe candelabra base bulb 60W max  
 220-240V: (1)E27 base 60W max and (1)E14 base golf ball 60W max  
 Note: Bulbs not included.  
 Halogen bulbs not recommended.

**Wattage**

120 watts max

**Weight**

10 lbs (4.5 kg)

**Remarks**



Specify drop length.  
 Fixed drop not adjustable on site.  
 Specify fixture length.  
 Additional weight support recommended for junction box installation.  
 Indoor use and dry locations only.

**Dimensions**

Fixture length options:  
 Large: 81" (206 cm)  
 Small: 67" (170 cm)  
 Arm lengths from balance point:  
 Large: long side: 50.5" (128 cm) / short side: 30.5" (77 cm)  
 Small: long side: 43" (109 cm) / short side: 24" (61 cm)  
 Ceiling mount diameter: 5" (13 cm)  
 Minimum overall height: 6" (15 cm)  
 Small shade: 6" Ø x 5.5" H (15 Ø x 14 cm H)  
 Large Shade: 8.25" Ø x 6.5" H (21 Ø x 17 cm H)



No. 436

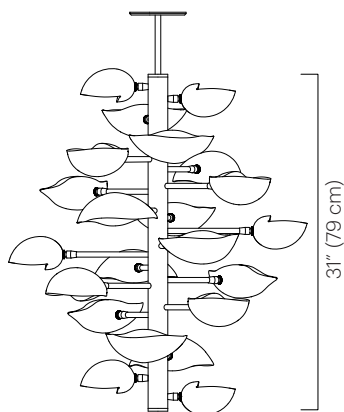

26.5" (67 cm) approx. diameter

**Description**

The Lapa is a balanced fixture comprised of 22 shell shades. Each shade is hand-formed in our Brooklyn studio, and can rotate 320° to cast light directionally.

**Materials**

Frame: Plated steel  
Shades: Powder coated aluminum  
Drop: Plated steel

**Shade Color**

- Grey Gloss (grey gloss interior)
- Ivory Satin (ivory satin interior)
- Black Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

**Frame Color**

- Brushed Brass
- Polished Nickel

Custom finishes available.

**Lamping**

120V: (22)G16.5 globe bulb  
candelabra base 15W max  
220-240V: (22)E14 base golf ball  
15W max  
Note: Bulbs not included.  
Halogen bulbs not recommended.

**Wattage**

330W max

**Weight**

25 lbs (11.5 kg)


**Remarks**

Specify drop length.  
Fixed drop not adjustable on site.  
Ceiling mount consistent with shade color.  
Arm lengths not adjustable.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

**Dimensions**

26.5" Dia x 31" H  
(67 Dia x 79 cm H)  
Minimum overall height: 34"  
(86cm)  
Shell Shade (approx.):  
3.5" H x 9" W x 6" D  
(9 H x 23 W x 15 cm D)



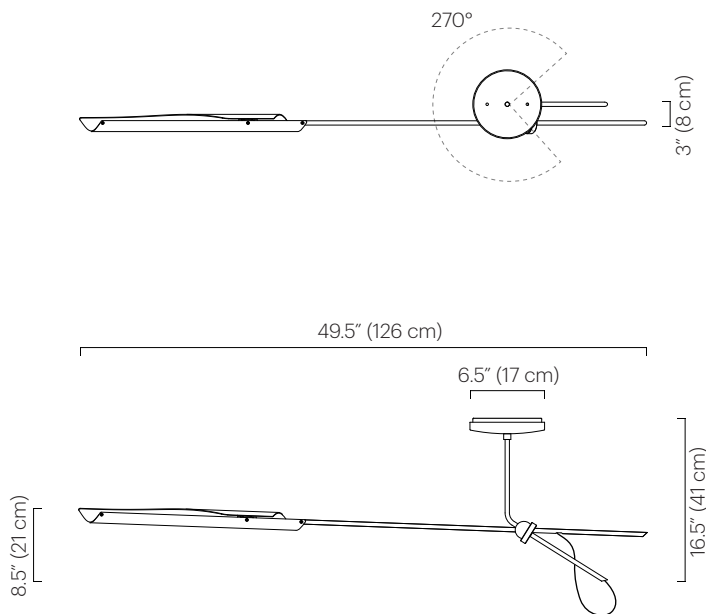

### Description

The OTTO One Arm S is a lower profile version of our OTTO One Arm fixture featuring a single cantilevered arm. The OTTO shade contains a dimmable LED source and rotates 300° to cast light directionally. The fixture can rotate 270° from the canopy.

### Materials

Shade: Powder coated aluminum  
Ceiling mount: Powder coated aluminum and steel.  
Frame: Plated brass  
Drop: Plated brass  
Hardware: Plated and polished brass

### Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

### Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

### Lamping

LED: Warm white 2700K  
Lumens: 500 (equivalent to one 40W incandescent bulb)  
CRI: 80+  
50,000 LED life hours (approx.)

### Power Supply

For 120V areas: 60W 24V phase dimmable class 2 included in canopy.  
For 220-240V areas: remote power supply only. Not included.

### Dimmer Compatibility

Dimmable with ELV

### Voltage / Wattage

24V / 11 watts

### Weight

5 lbs (2.3 kg)

### Remarks



Fixed drop not adjustable on site.  
Arm length is fixed.  
Not for use on sloped ceilings.  
Black exterior electrical cord is standard.  
Hardware finish consistent with frame finish.  
Ceiling mount consistent with shade color.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

### Dimensions

49.5" L x 16.5" H x 3" W  
(126 L x 41 H x 8 cm W)  
Canopy mount: 6.5" Ø x 1.25" H  
(17 Ø x 3 cm H)  
Shade: 1.5" Ø x 20" L  
(4 Ø x 51 cm L)



No. 443

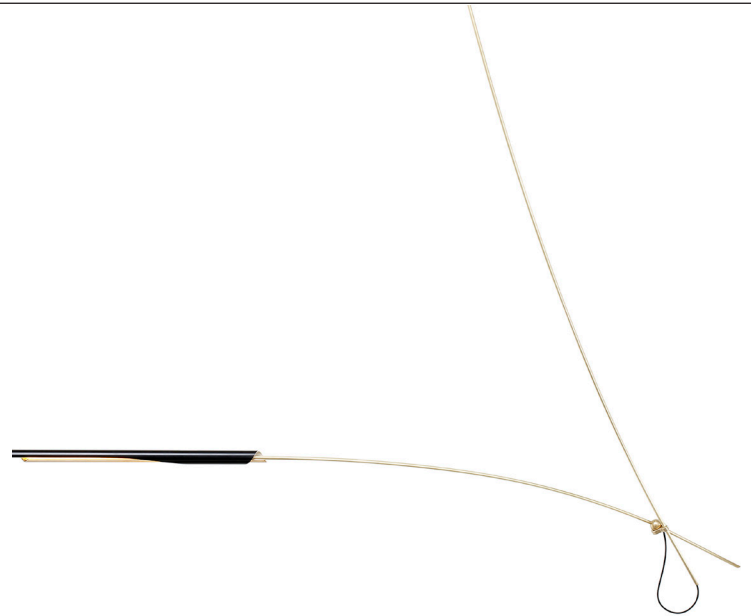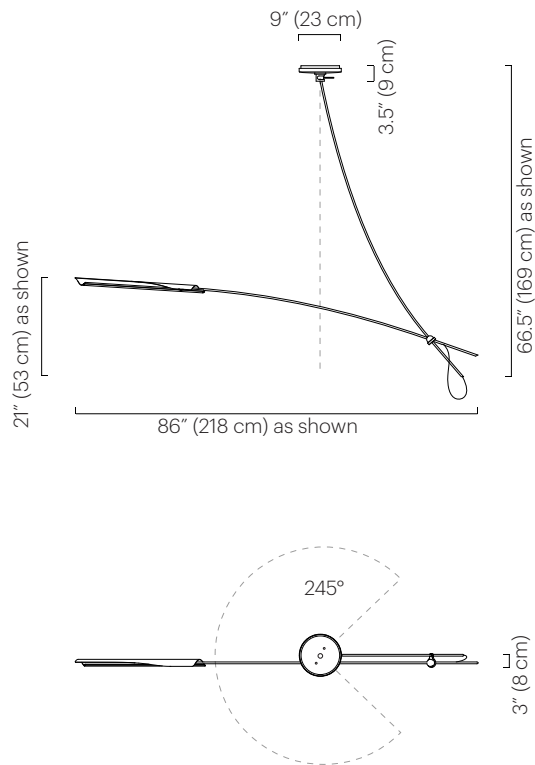

## Description

The OTTO One Arm features a single cantilevered arm extending from a drop. The naturally occurring arcs of the fixture will vary depending on the length of the drop. The OTTO shade contains a dimmable LED source and rotates 300° to cast light directionally. The fixture can rotate 245° from the canopy.

## Materials

Shade: Powder coated aluminum  
Ceiling mount: Powder coated and plated aluminum  
Frame: Plated brass  
Drop: Plated brass  
Hardware: Plated and polished brass

## Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

## Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

## Lamping

LED: Warm white 2700K  
Lumens: 840 (equivalent to one 60W incandescent bulb)  
CRI: 80+  
50,000 LED life hours (approx.)

## Power Supply

For 120V areas: 20W 24V phase dimmable class 2 included in canopy.  
For 220-240V areas: remote power supply only. Not included.

## Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

## Voltage / Wattage

24V / 11 watts

## Weight

5 lbs (2.3 kg)

## Remarks

Specify drop length.  
Fixed drop not adjustable on site.  
Arm length is fixed.  
Not for use on sloped ceilings.  
Black exterior electrical cord is standard.

## Remarks continued

Hardware finish consistent with frame finish.  
Ceiling mount consistent with shade color.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.


## Dimensions

3" D x 86" W x 21" H  
(8 D x 218 W x 53 cm H)  
Canopy mount: 9" Ø x 3.5" H  
(23 Ø x 9 cm H)  
Shade: 1.5" Ø x 28" L  
(4 Ø x 71 cm L)  
Min overall height: 27.5" (70 cm)  
Max overall height: 135.5" (344 cm)







No. 443

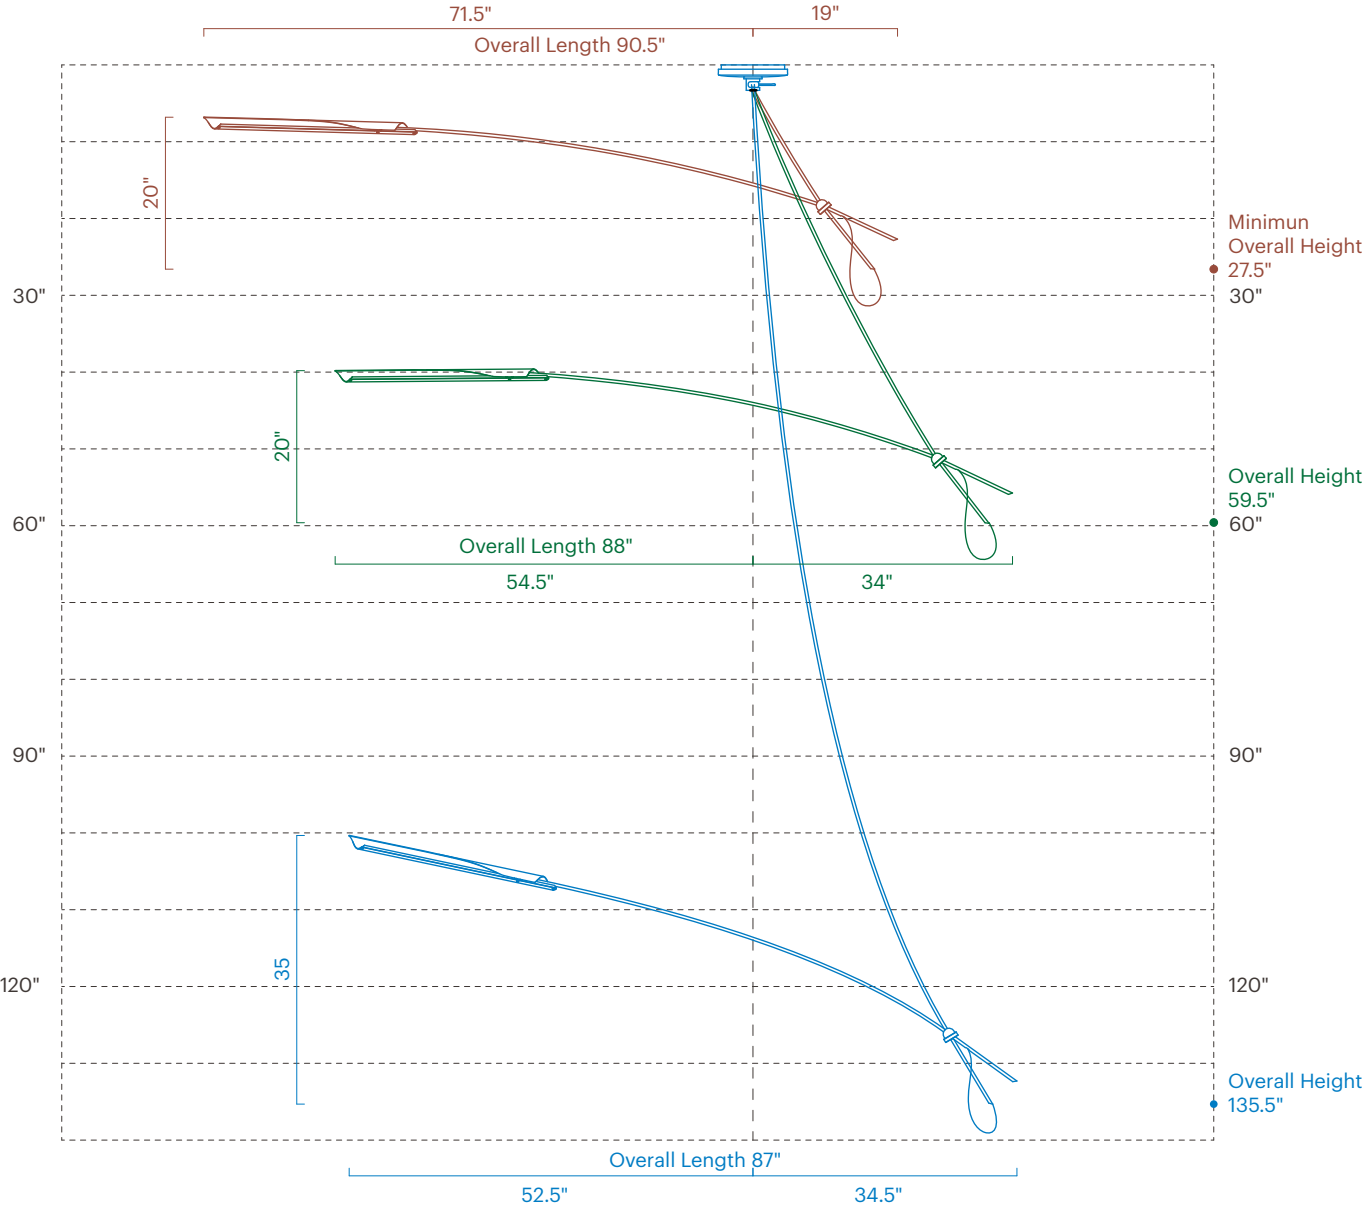

No. 444

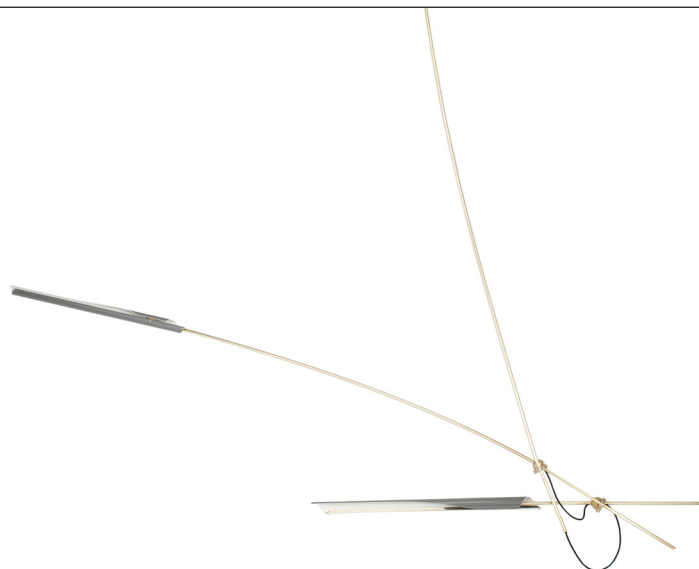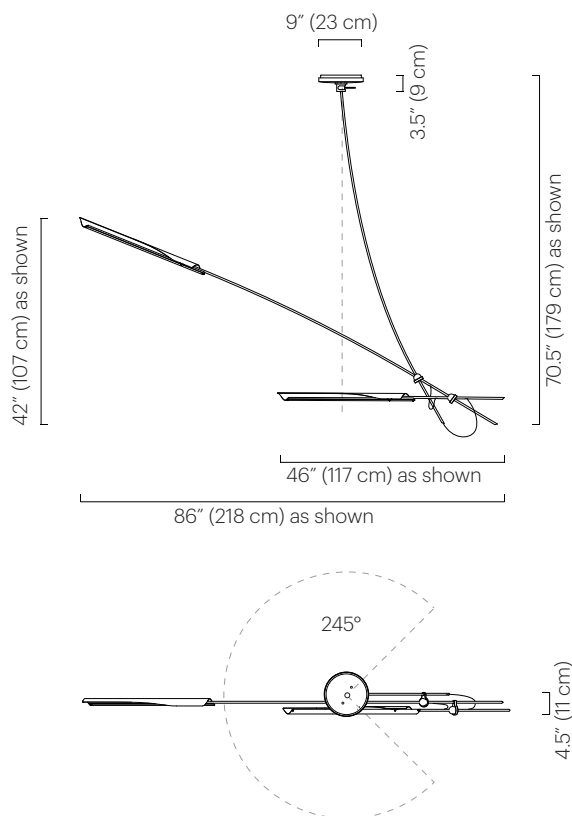

### Description

The OTTO Two Arm features two arms extending from a drop. The naturally occurring arcs of the fixture will vary depending on the length of the drop. The OTTO shade contains a dimmable LED source and rotates 300° to cast light directionally. The fixture can rotate 245° from the canopy.

### Materials

Shade: Powder coated aluminum  
Ceiling mount: Powder coated and plated aluminum  
Frame: Plated brass  
Drop: Plated brass  
Hardware: Plated and polished brass

### Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

### Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

### Lamping

LED: Warm white 2700K  
Lumens: 1680 (equivalent to two 60W incandescent bulbs)  
CRI: 80+  
50,000 LED life hours (approx.)

### Power Supply

For 120V areas: 40W 24V phase dimmable class 2 included in canopy.  
For 220-240V areas: remote power supply only. Not included.

### Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

### Voltage / Wattage

24V / 22 watts

### Weight

5 lbs (2.3 kg)

### Remarks

Specify drop length.  
Fixed drop not adjustable on site.  
Arm length is fixed.  
Not for use on sloped ceilings.  
Black exterior electrical cord is standard.

### Remarks continued


Hardware finish consistent with frame finish.  
Ceiling mount consistent with shade color.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

### Dimensions



4.5" D x 86" W x 42" H  
(11 D x 218 W x 107 cm H)  
Canopy mount: 9" Ø x 3.5" H  
(23 Ø x 9 cm H)  
Shades: 1.5" Ø x 28" L  
(4 Ø x 71 cm L)  
Min overall height: 34.5" (88 cm)  
Max overall height: 132.5" (336.5 cm)



No. 444

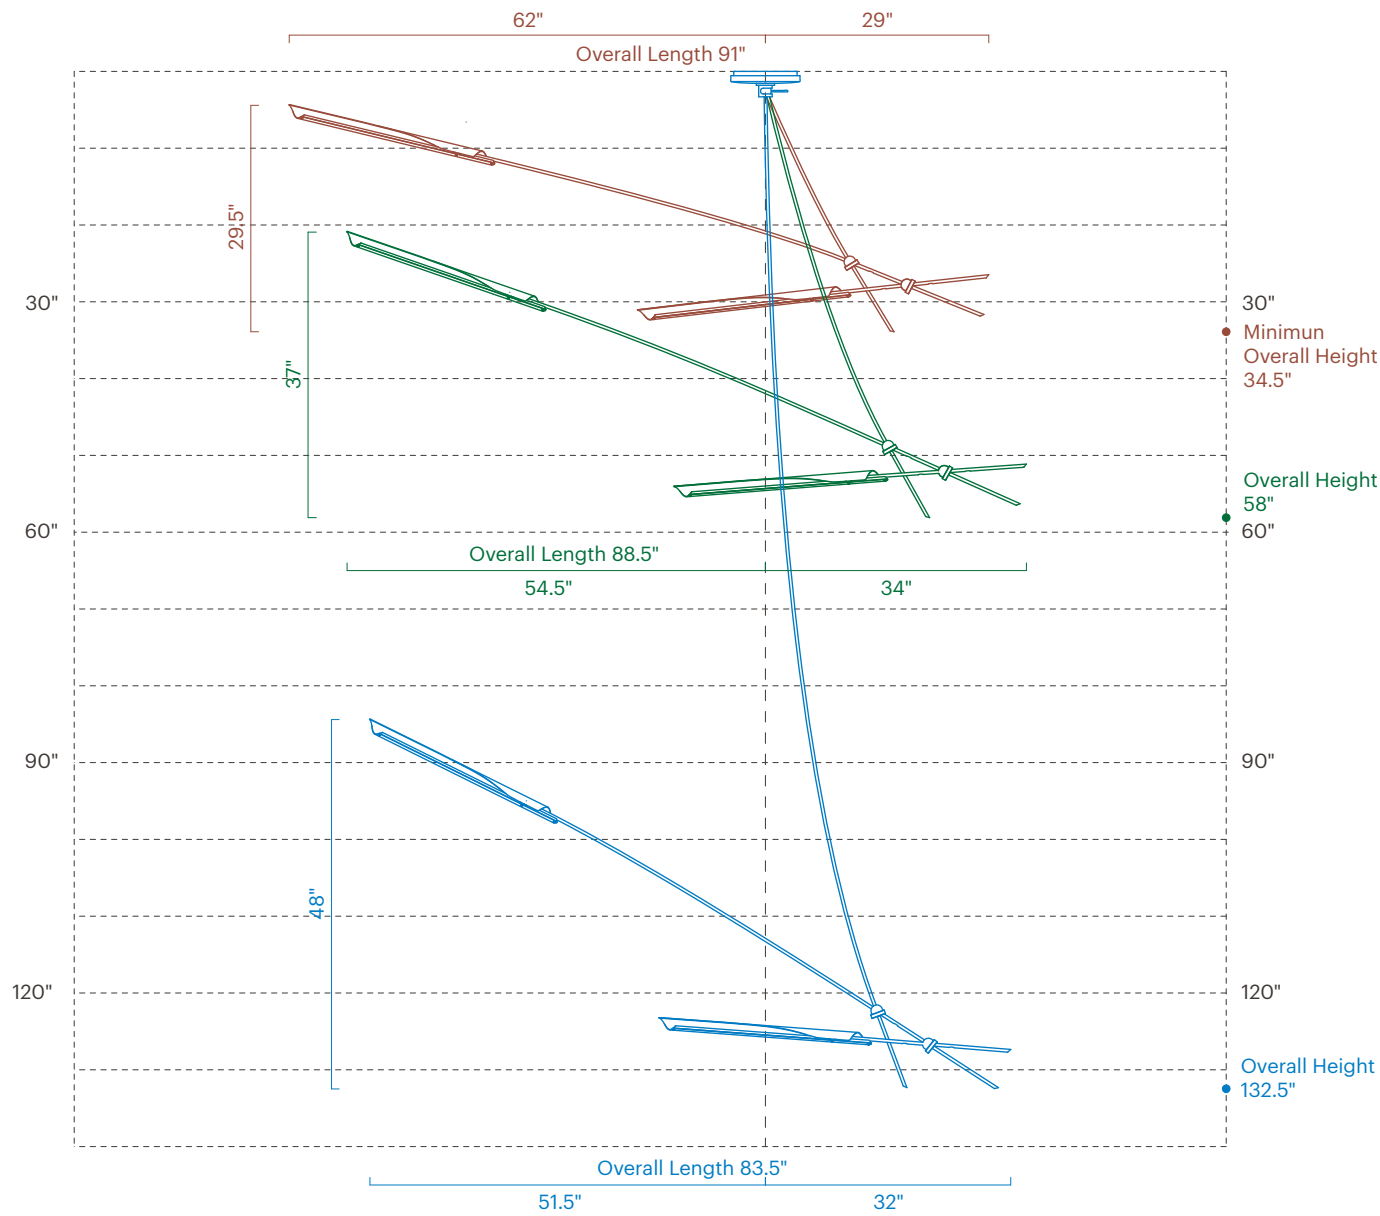

No. 445

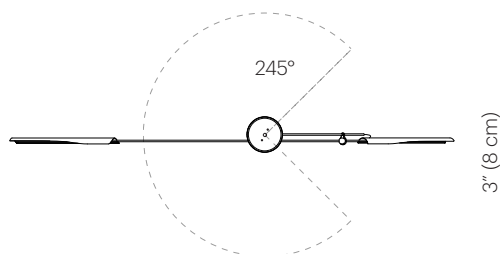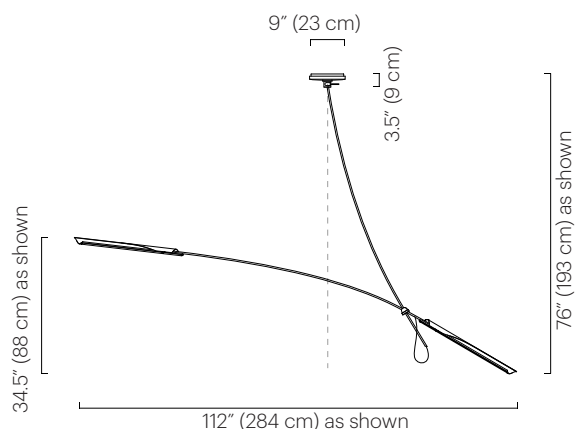

## Description

The OTTO Double features one arm with a shade on either end extending from a customizable drop. The naturally occurring arcs of the fixture will vary depending on the length of the drop. The OTTO shades contain a dimmable LED source and rotate 300° to cast light directionally. The fixture can rotate 245° from the canopy.

## Materials

Shade: Powder coated aluminum  
Ceiling mount: Powder coated and plated aluminum  
Frame: Plated brass  
Drop: Plated brass  
Hardware: Plated and polished brass

## Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

## Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

## Lamping

LED: Warm white 2700K  
Lumens: 1680 (equivalent to two 60W incandescent bulbs)  
CRI: 80+  
50,000 LED life hours (approx.)

## Power Supply

For 120V areas: 40W 24V phase dimmable class 2 included in canopy.  
For 220-240V areas: remote power supply only. Not included.

## Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

## Voltage / Wattage

24V / 22 watts

## Weight

5 lbs (2.3 kg)

## Remarks

Specify drop length.  
Fixed drop not adjustable on site.  
Arm length is fixed.  
Not for use on sloped ceilings.  
Black exterior electrical cord is standard.

## Remarks continued


Hardware finish consistent with frame finish.  
Ceiling mount consistent with shade color.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

## Dimensions


3" D x 112" W x 34.5" H  
(8 D x 284 W x 88 cm H)  
Canopy mount: 9" Ø x 3.5" H  
(23 Ø x 9 cm H)  
Shades: 1.5" Ø x 28" L  
(4 Ø x 71 cm L)  
Min overall height: 37.5" (95 cm)  
Max overall height: 134.5" (342 cm)



No. 445

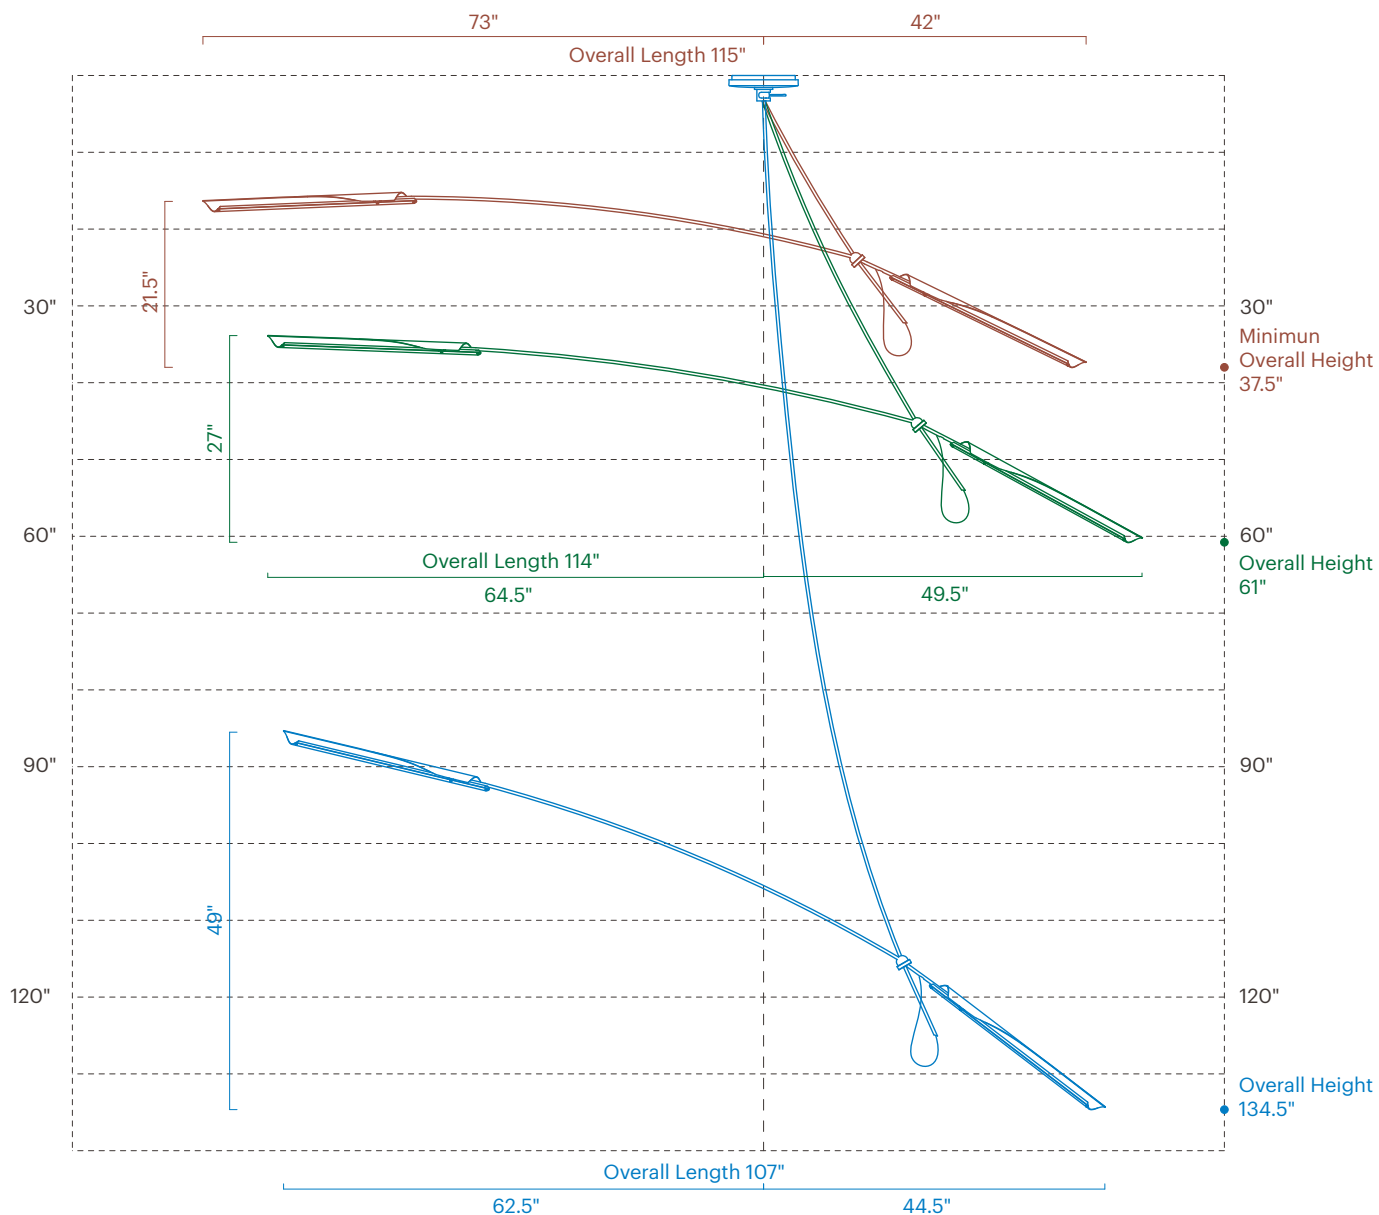

No. 446

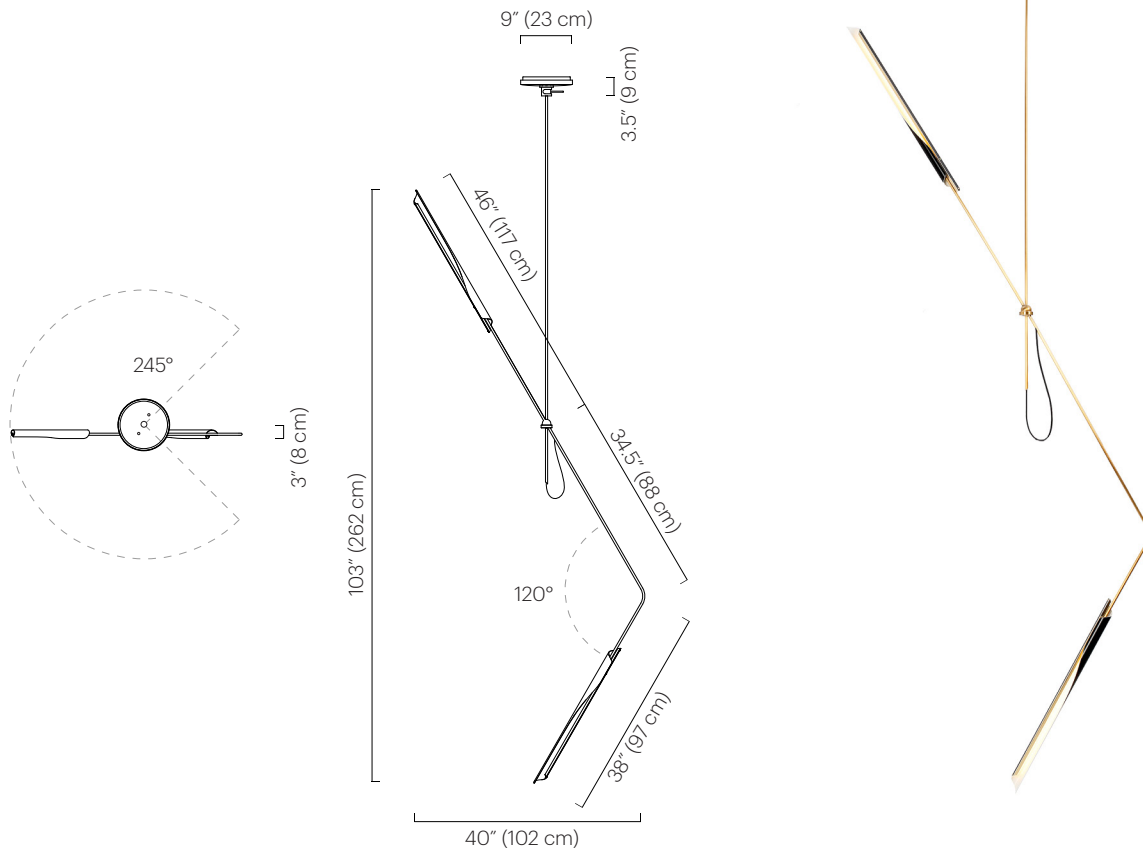**Description**

The OTTO L features one bent arm with an OTTO shade on each end. The OTTO shade contains a dimmable LED source and rotates 300° to cast light directionally. The fixture can rotate 245° from the canopy. Fixture is balanced by design; angle is not adjustable.

**Materials**

Shade: Powder coated aluminum  
 Ceiling mount: Powder coated and plated aluminum  
 Frame: Plated brass  
 Drop: Plated brass  
 Hardware: Plated and polished brass

**Shade Color**

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

**Finish**

- Brushed Brass
- Polished Nickel

Custom finishes available.

**Lamping**

LED: Warm white 2700K  
 Lumens: 1680 (equivalent to two 60W incandescent bulbs)  
 CRI: 80+  
 50,000 LED life hours (approx.)

**Power Supply**

For 120V areas: 40W 24V phase dimmable class 2 included in canopy.  
 For 220-240V areas: remote power supply only. Not included.

**Dimmer Compatibility**

Dimmable with MLV/TRIAC (leading edge) switch

**Voltage / Wattage**

24V / 22 watts

**Weight**

5 lbs (2.3 kg)

**Remarks**


Specify drop length.  
 Fixed drop not adjustable on site.  
 Arm length is fixed.  
 Not for use on sloped ceilings.  
 Black exterior electrical cord is standard.  
 Hardware finish consistent with frame finish.  
 Ceiling mount consistent with shade color.  
 Additional weight support recommended for junction box installation.  
 Indoor use and dry locations only.

**Dimensions**

3" D x 40" W x 103" H  
 (8 D x 102 W x 262 cm H)  
 Canopy mount: 9" Ø x 3.5" H  
 (23 Ø x 9 cm H)  
 Shades: 1.5" Ø x 28" L  
 (4 Ø x 71 cm L)  
 Min overall height: 109"  
 (277 cm)



No. 446

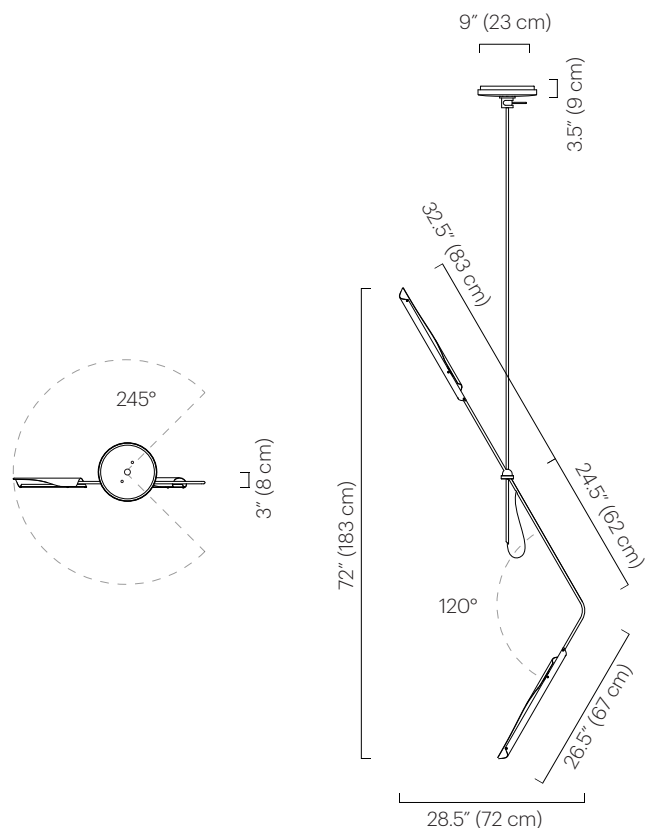**Description**

The OTTO LS features one bent arm with an OTTO shade on each end. The OTTO shades contain a dimmable LED source and rotate 300° to cast light directionally. The fixture can rotate 245° from the canopy. Fixture is balanced by design; angle is not adjustable.

**Materials**

Shade: Powder coated aluminum  
Ceiling mount: Powder coated and plated aluminum  
Frame: Plated brass  
Drop: Plated brass  
Hardware: Plated and polished brass

**Shade Color**

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

**Finish**

- Brushed Brass
- Polished Nickel

Custom finishes available.

**Lamping**

LED: Warm white 2700K  
Lumens: 1000 (equivalent to two 40W incandescent bulbs)  
CRI: 80+  
50,000 LED life hours (approx.)

**Power Supply**

For 120V areas: 40W 24V phase dimmable class 2 included in canopy.  
For 220-240V areas: remote power supply only. Not included.

**Dimmer Compatibility**

Dimmable with MLV/TRIAC (leading edge) switch

**Voltage / Wattage**

24V / 22 watts

**Weight**

5 lbs (2.3 kg)

**Remarks**


Specify drop length.  
Fixed drop not adjustable on site.  
Arm length is fixed.  
Not for use on sloped ceilings.  
Black exterior electrical cord is standard.  
Hardware finish consistent with frame finish.  
Ceiling mount consistent with shade color.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

**Dimensions**

3" D x 28.5" W x 72" H  
(8 D x 72 W x 183 cm H)  
Canopy mount: 9" Ø x 3.5" H  
(23 Ø x 9 cm H)  
Shades: 1.5" Ø x 20" L  
(4 Ø x 51 cm L)  
Min overall height: 78"  
(198 cm)



No. 447

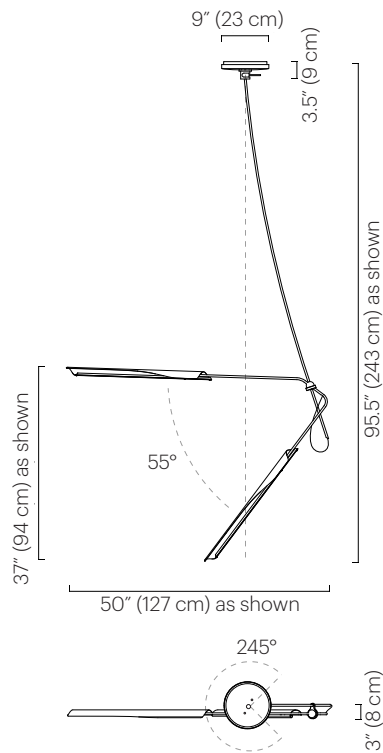

## Description

The OTTO V features one bent arm with an OTTO shade on each end. The naturally occurring arc of the drop will vary depending on the length. Fixture is balanced by design; arm angles are not adjustable. The OTTO shades contain a dimmable LED source and rotate 300° to cast light directionally. The fixture can rotate 245° from the canopy.

## Materials

Shade: Powder coated aluminum  
Ceiling mount: Powder coated and plated aluminum  
Frame: Plated brass  
Drop: Plated brass  
Hardware: Plated and polished brass

## Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

## Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

## Lamping

LED: Warm white 2700K  
Lumens: 1680 (equivalent to two 60W incandescent bulbs)  
CRI: 80+  
50,000 LED life hours (approx.)

## Power Supply

For 120V areas: 40W 24V phase dimmable class 2 included in canopy.  
For 220-240V areas: remote power supply only. Not included.

## Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

## Voltage / Wattage

24V / 22 watts

## Weight

5 lbs (2.3 kg)

## Remarks

Specify drop length.  
Fixed drop not adjustable on site.  
Arm length is fixed.  
Not for use on sloped ceilings.  
Black exterior electrical cord is standard.

## Remarks continued

Hardware finish consistent with frame finish.  
Ceiling mount consistent with shade color.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.


## Dimensions

3" D x 50" W x 37" H  
(8 D x 127 W x 94 cm H)  
Canopy mount: 9" Ø x 3.5" H  
(23 Ø x 9 cm H)  
Shade: 1.5" Ø x 28" L  
(4 Ø x 71 cm L)  
Min overall height: 42.5" (108 cm)  
Max overall height: 131.5" (334 cm)






No. 447

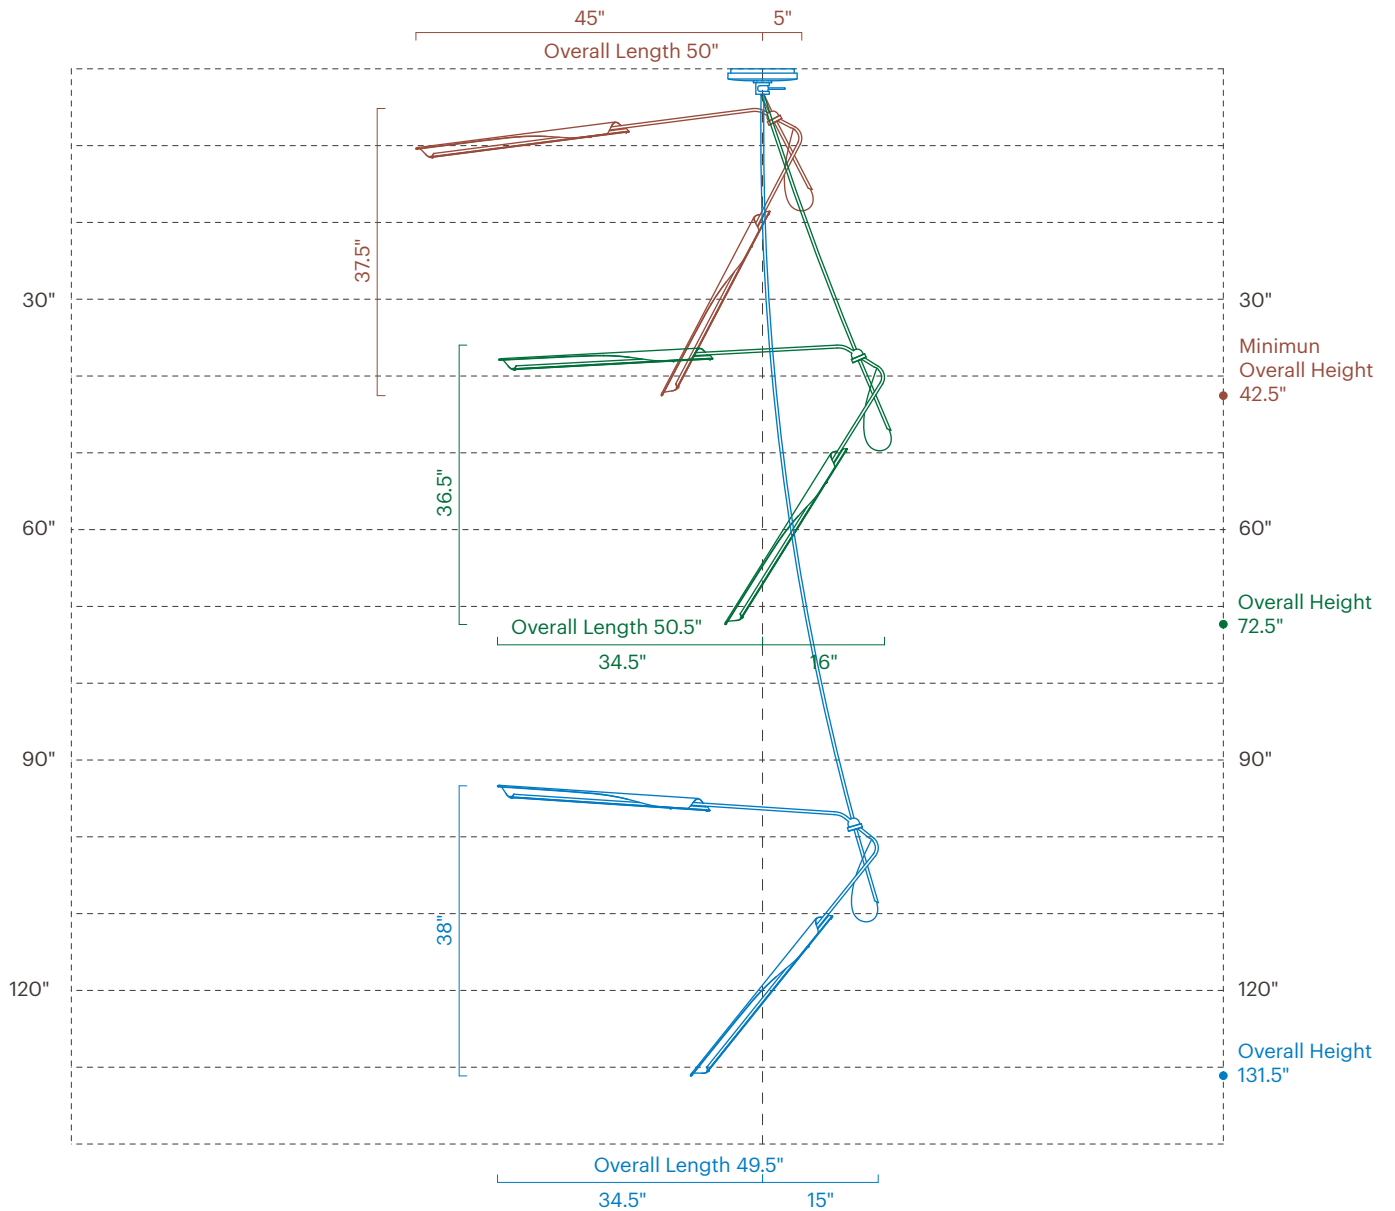

No. 448

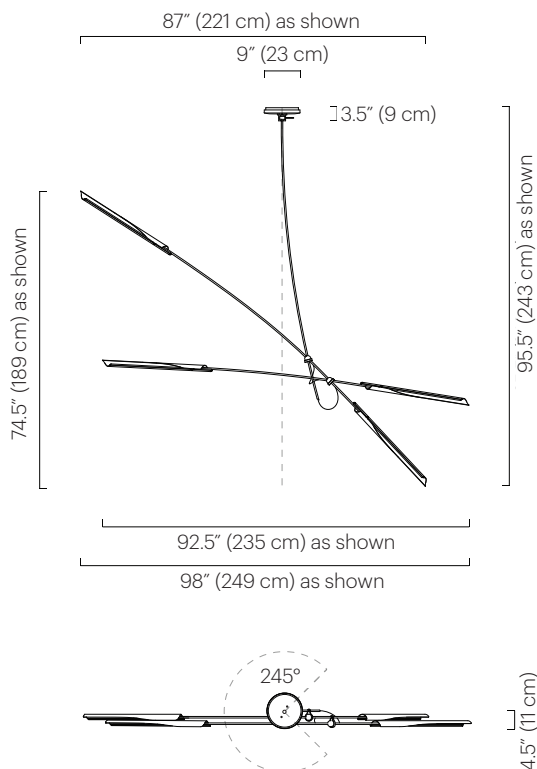

## Description

The OTTO X features two intersecting arms with an OTTO shade on each end extending from a drop. The naturally occurring arcs of the fixture will vary depending on the length of the drop. All four OTTO shades contain a dimmable LED source. Each shade rotates 300° to cast light directionally. The fixture can rotate 245° from the canopy.

## Materials

Shades: Powder coated aluminum  
Ceiling mount: Powder coated and plated aluminum  
Frame: Plated brass  
Drop: Plated brass  
Hardware: Plated and polished brass

## Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

## Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

## Lamping

LED: Warm white 2700K  
Lumens: 3360 (equivalent to four 60W incandescent bulbs)  
CRI: 80+  
50,000 LED life hours (approx.)

## Power Supply

For 120V areas: 60W 24V phase dimmable class 2 included in canopy.  
For 220-240V areas: remote power supply only. Not included.

## Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

## Voltage / Wattage

24V / 44 watts

## Weight

10 lbs (4.5 kg)

## Remarks

Specify drop length.  
Fixed drop not adjustable on site.  
Arm length is fixed.  
Not for use on sloped ceilings.  
Black exterior electrical cord is standard.

## Remarks continued


Hardware finish consistent with frame finish.  
Ceiling mount consistent with shade color.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

## Dimensions

4.5" D x 98" W x 74.5" H  
(11 D x 249 W x 189 cm H)  
Canopy mount: 9" Ø x 3.5" H  
(23 Ø x 9 cm H)  
Shade: 1.5" Ø x 28" L  
(4 Ø x 71 cm L)  
Min overall height: 74" (188 cm)  
Max overall height: 159" (404 cm)




No. 448

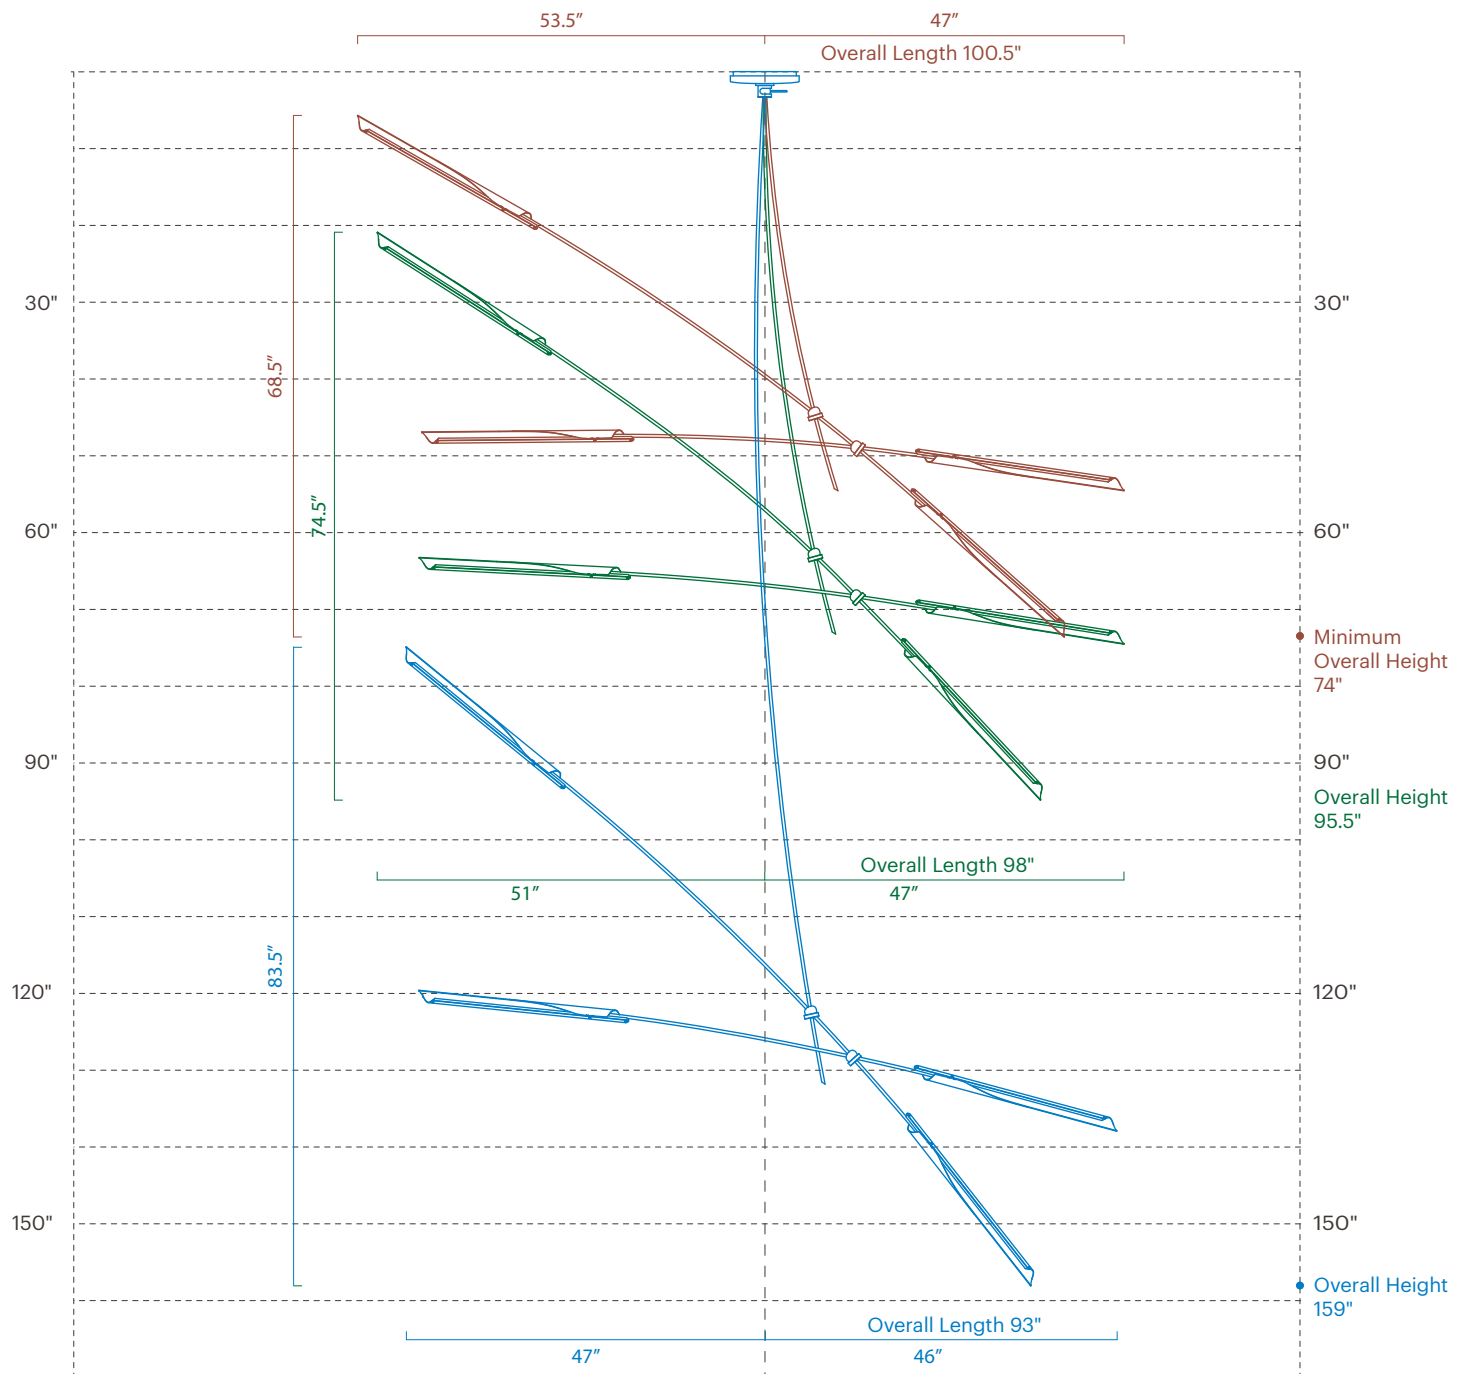

# Treble Single

## TECHNICAL SPECIFICATIONS

No. 451

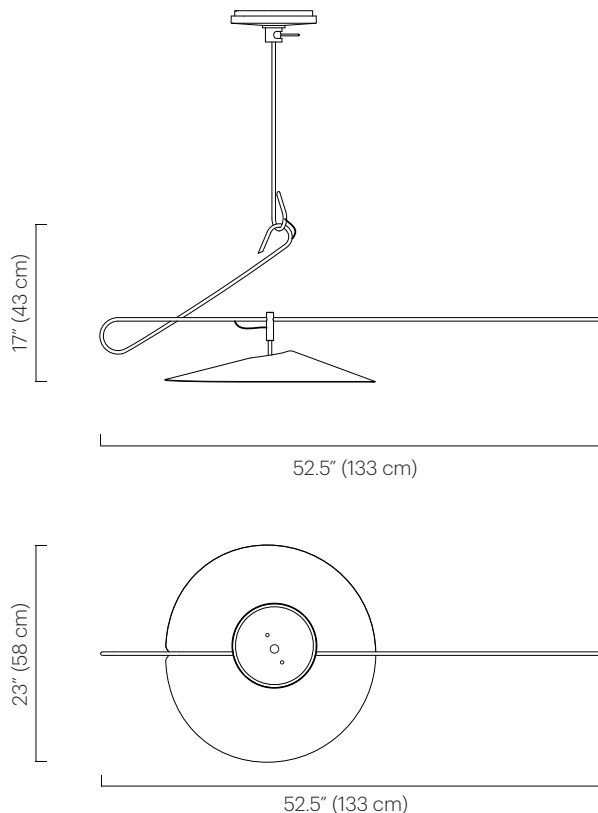

### Description

The Treble Single is a balanced fixture on an asymmetrical axis, which allows gentle movement. The fixture has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with a glass diffuser. The fixture can rotate 245° from the canopy.

### Materials

Shade: Anodized or powder coated aluminum  
Ceiling mount: Powder coated aluminum and steel.  
Frame: Plated brass  
Drop: Plated brass  
Lamp enclosure: Glass, aluminum, steel and plated brass.

### Shade Color

Powder coated:

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Anodized:

- Polished Black (matte gold interior)
- Polished Black (red ombre interior)

### Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

### Lamping

LED: Warm white 2700K  
Lumens: 1200 (equivalent to one 75W incandescent bulb)  
CRI: 95+  
50,000 LED life hours (approx.)

### Power Supply

For 120V areas: 60W 24V dimmable Class 2 included in canopy.  
For 220-240V areas: remote power supply only. Not included.

### Dimmer Compatibility

ELV Dimmer compatible

### Voltage / Wattage

24V /12W

### Weight

10 lbs (4.5 kg)

### Remarks

Specify drop length.  
Fixed drop not adjustable on site.  
Arm length is fixed.  
Shade does not rotate.  
Not for use on sloped ceilings.  
Black exterior electrical cord is standard.  
Hardware finish consistent with frame finish.  
Ceiling mount consistent with shade color.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

### Dimensions

52.5" L x 23" W x 17" H  
(133 L x 58 W x 43 cm H)  
Canopy mount: 9" Ø x 3.5" H  
(23 Ø x 9 cm H)  
Shade: 23" Ø x 4" H  
(58 Ø x 10 cm H)  
Min. overall height: 25" (63 cm)




**David  
Weeks  
Studio**

[www.DavidWeeksStudio.com](http://www.DavidWeeksStudio.com)

# Treble Mobile - 2 Tier

## TECHNICAL SPECIFICATIONS

No. 452

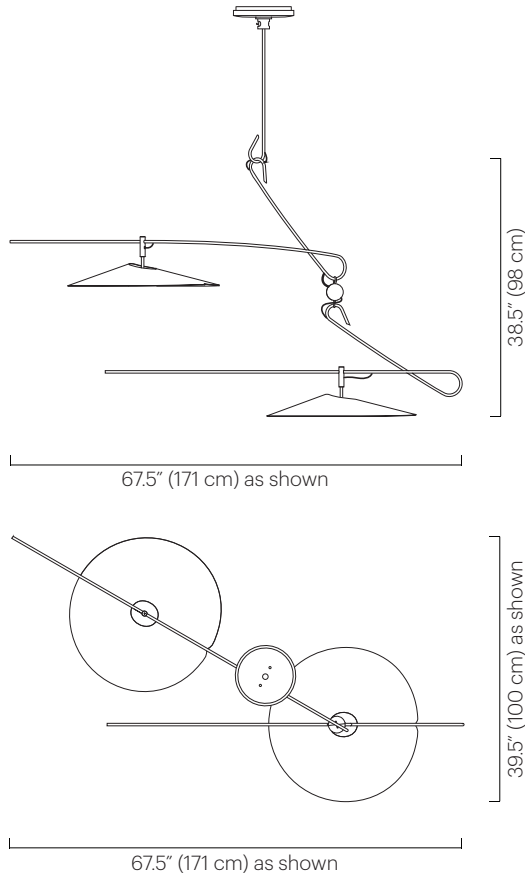

### Description

The Treble Mobile features two tiers of different lengths that balance on asymmetrical axes, which allows gentle movement. Each tier has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with a glass diffuser. The fixture can rotate 245° from the canopy. Tier rotation is adjustable and can be set on site.

### Materials

Shade: Anodized or powder coated aluminum  
Ceiling mount: Powder coated aluminum and steel.  
Frame: Plated brass  
Drop: Plated brass  
Lamp enclosure: Glass, aluminum, steel and plated brass.

### Shade Color

Powder coated:

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Anodized:

- Polished Black (matte gold interior)
- Polished Black (red ombre interior)

### Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

### Lamping

LED: Warm white 2700K  
Lumens: 2400 (equivalent to two 75W incandescent bulbs)  
CRI: 95+  
50,000 LED life hours (approx.)

### Power Supply

For 120V areas: 60W 24V dimmable Class 2 included in canopy.  
For 220-240V areas: remote power supply only. Not included.

### Dimmer Compatibility

ELV Dimmer compatible

### Voltage / Wattage

24V / 23W

### Weight

15 lbs (6.8 kg)

### Remarks

Specify drop length.  
Fixed drop not adjustable on site.

### Remarks continued

Arm length is fixed.  
Shade does not rotate.  
Not for use on sloped ceilings.  
Black exterior electrical cord is standard.  
Hardware finish consistent with frame finish.  
Ceiling mount consistent with shade color.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

### Dimensions





Tier 1: 52.5" (133 cm)  
Tier 2: 57" (145 cm)  
Max. dimensions: 90" L x 23" W (229 L x 58 cm W)  
Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H)  
Shade: 23" Ø x 4" H (58 Ø x 10 cm H)  
Min. overall height: 46.5" (118 cm)




**David  
Weeks  
Studio**

www.DavidWeeksStudio.com

No. 452

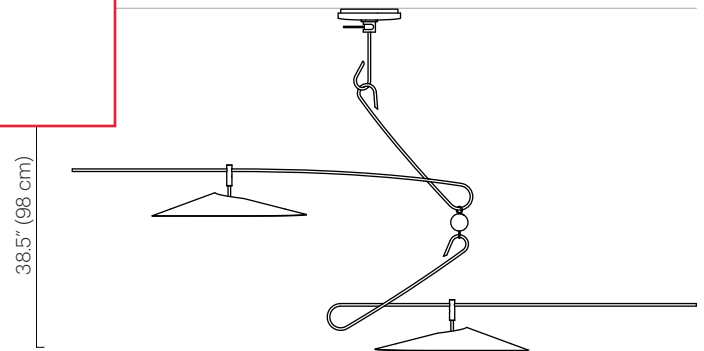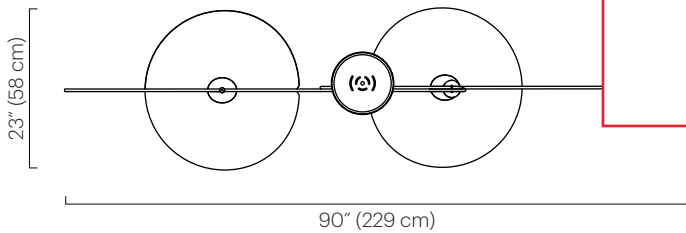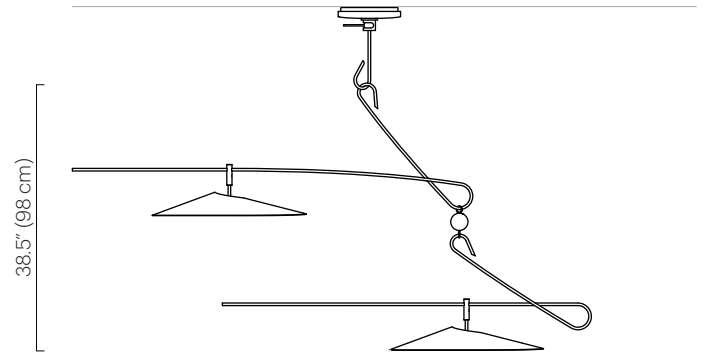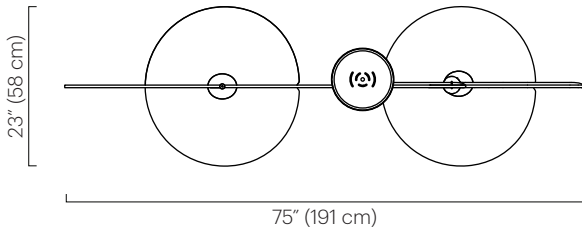

No. 452

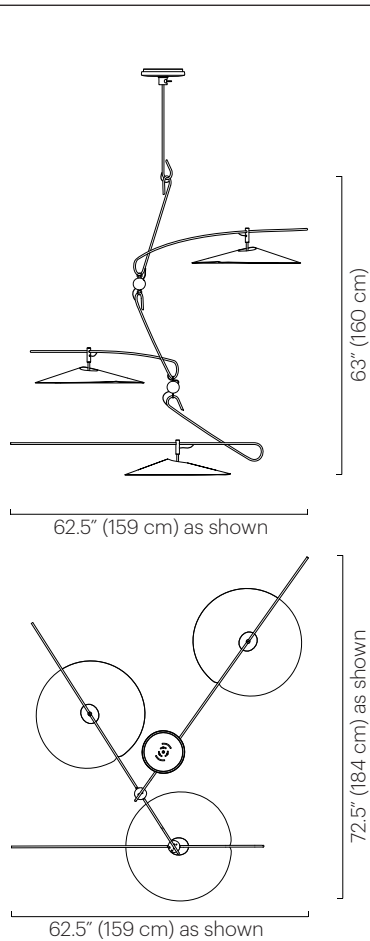

### Description

The Treble Mobile features three tiers of different lengths that balance on asymmetrical axes, which allows gentle movement. Each tier has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with a glass diffuser. The fixture can rotate 245° from the canopy. Tier rotation is adjustable and can be set on site.

### Materials

Shade: Anodized or powder coated aluminum  
Ceiling mount: Powder coated aluminum and steel.  
Frame: Plated brass  
Drop: Plated brass  
Lamp enclosure: Glass, aluminum, steel and plated brass.

### Shade Color

Powder coated:

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Anodized:

- Polished Black (matte gold interior)
- Polished Black (red ombre interior)

### Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

### Lamping

LED: Warm white 2700K  
Lumens: 3600 (equivalent to three 75W incandescent bulbs)  
CRI: 95+  
50,000 LED life hours (approx.)

### Power Supply

For 120V areas: 60W 24V dimmable Class 2 included in canopy.  
For 220-240V areas: remote power supply only. Not included.

### Dimmer Compatibility

ELV Dimmer compatible

### Voltage / Wattage

24V / 35W

### Weight

25 lbs (11.3) kg

### Remarks

Specify drop length.  
Fixed drop not adjustable on site  
Arm length is fixed.

### Remarks continued





Shade does not rotate.  
Not for use on sloped ceilings.  
Black exterior electrical cord is standard.  
Hardware finish consistent with frame finish.  
Ceiling mount consistent with shade color.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

### Dimensions

Tier 1: 52.5" (133 cm)  
Tier 2: 57" (145 cm)  
Tier 3: 63" (160 cm)  
Max. dimensions: 108.5" L x 23" W (267 L x 58 cm W)  
Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H)  
Shade: 23" Ø x 4" H (58 Ø x 10 cm H)  
Min. overall height: 71" (180 cm)



No. 452

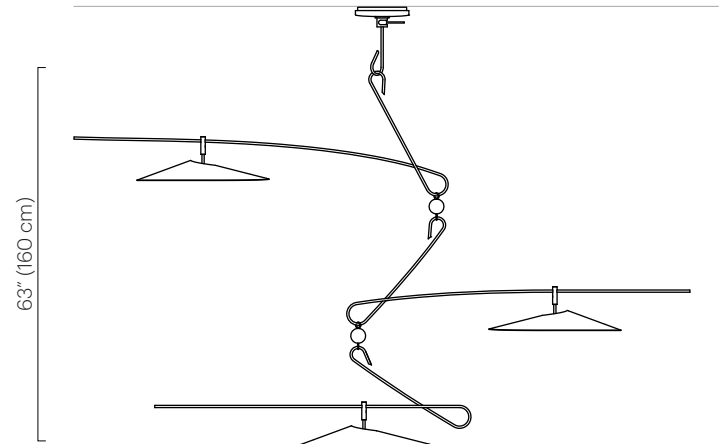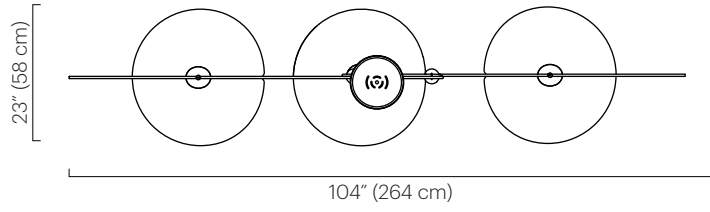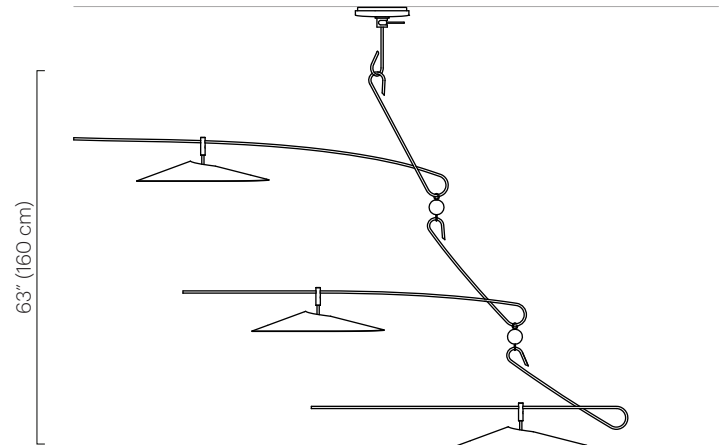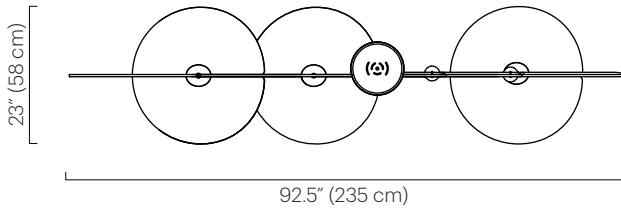




# Treble Mobile - 4 Tier

## TECHNICAL SPECIFICATIONS

No. 452

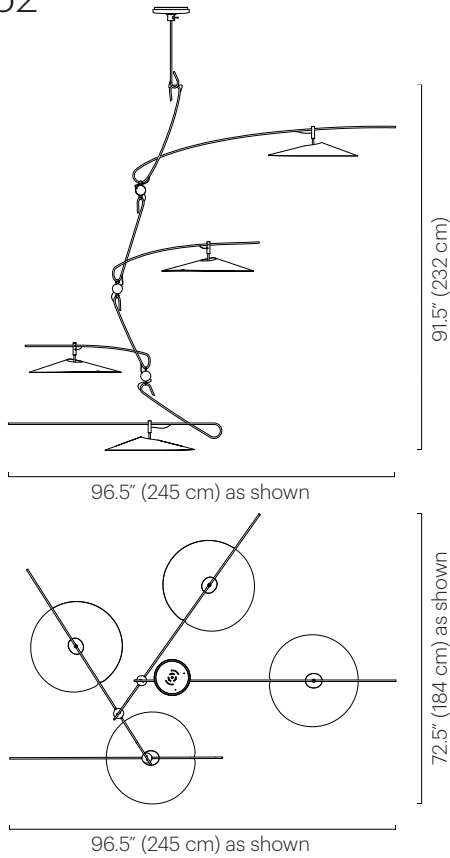

### Description

The Treble Mobile features four tiers of different lengths that balance on asymmetrical axes, which allows gentle movement. Each tier has one Treble shade constructed from a flat cut aluminum pattern held together in tension, illuminated by a dimmable LED with a glass diffuser. The fixture can rotate 245° from the canopy. Tier rotation is adjustable and can be set on site.

### Materials

Shade: Anodized or powder coated aluminum  
Ceiling mount: Powder coated aluminum and steel.  
Frame: Plated brass  
Drop: Plated brass  
Lamp enclosure: Glass, aluminum, steel and plated brass.

### Shade Color

Powder coated:

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Anodized:

- Polished Black (matte gold interior)
- Polished Black (red ombre interior)

### Finish

- Brushed Brass
- Polished Nickel

Custom finishes available.

### Lamping

LED: Warm white 2700K  
Lumens: 4800 (equivalent to four 75W incandescent bulbs)  
CRI: 95+  
50,000 LED life hours (approx.)

### Power Supply

For 120V areas: 60W 24V dimmable Class 2 included in canopy.  
For 220-240V areas: remote power supply only. Not included.

### Dimmer Compatibility

ELV Dimmer compatible

### Voltage / Wattage

24V / 46 W

### Weight

30 lbs (13.6 kg)

### Remarks

Specify drop length.  
Fixed drop not adjustable on site.  
Arm length is fixed.

### Remarks continued

Shade does not rotate.  
Not for use on sloped ceilings.  
Black exterior electrical cord is standard.  
Hardware finish consistent with frame finish.  
Ceiling mount consistent with shade color.  
Additional weight support recommended for junction box installation.  
Indoor use and dry locations only.

### Dimensions





Tier 1: 52.5" (133 cm)  
Tier 2: 57" (145 cm)  
Tier 3: 63" (160 cm)  
Tier 4: 65" (165 cm)  
Max. dimension: 122" L x 23" W (310 L x 58 cm W)  
Canopy mount: 9" Ø x 3.5" H (23 Ø x 9 cm H)  
Shade: 23" Ø x 4" H (58 Ø x 10 cm H)  
Min. overall height: 99.5" (253 cm)



**David  
Weeks  
Studio**

www.DavidWeeksStudio.com

No. 452

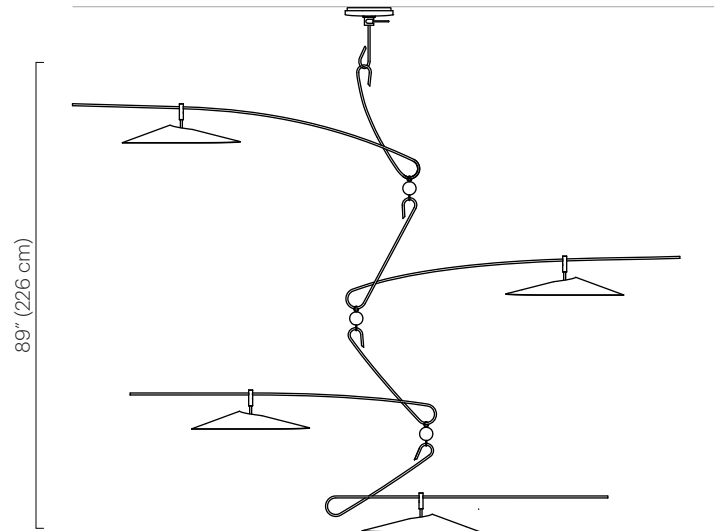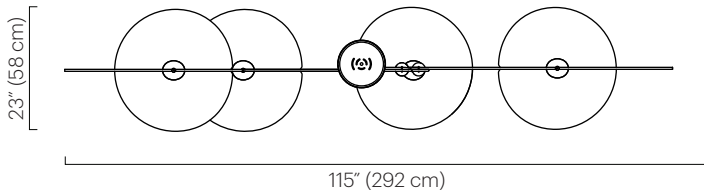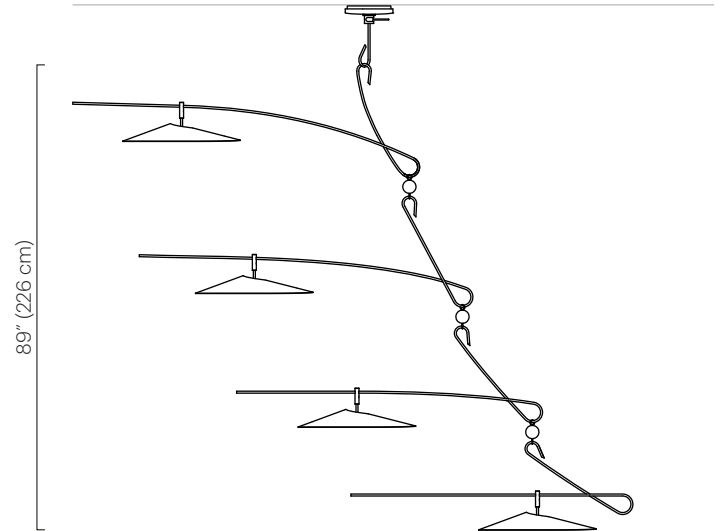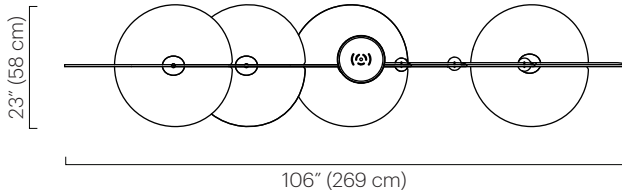

# David Weeks Studio

spencer  
interiors

spencer interiors  
vancouver bc canada  
telephone: 604.736.1378  
[www.spencerinteriors.ca](http://www.spencerinteriors.ca)

© 2019 David Weeks Studio, LLC. All Rights reserved.  
All lighting is made at David Weeks Studio in Brooklyn, New York. David Weeks Studio reserves all rights to all objects it designs and produces. No designs may be reproduced, in any form or material. The information in this catalog was correct at the time of printing. David Weeks Studio reserves the right to make changes in design and construction or discontinue products without prior notification.

[www.davidweeksstudio.com](http://www.davidweeksstudio.com)